

2025

# PRODUCTS CATALOG

A company that provides a total solution for a safe,  
convenient and human-centered life.



## 01

### IP VIDEOPHONE

|                                  |    |
|----------------------------------|----|
| KCV-S701IPOE .....               | 04 |
| KC-S81MPOE / AI PoE Switch ..... | 05 |
| KOCOM HOME APP .....             | 05 |
| KCV-S701IP2W .....               | 06 |
| KC-S81MIP .....                  | 07 |
| KCV-S701IPOE / KCV-S701IP2W      |    |
| LINKED PRODUCTS .....            | 08 |

## 02

### SMART HOME SYSTEM

|                                        |    |
|----------------------------------------|----|
| KSM-W240M .....                        | 12 |
| KHN-T130T9 .....                       | 13 |
| KHN-T100M9 .....                       | 14 |
| KFC-X43W / KC-T80T9 .....              | 15 |
| ASTRO KLP-U100F / ASTRO KGP-70KA ..... | 15 |

## 03

### ONE UTP SOLUTION

|                                              |    |
|----------------------------------------------|----|
| KCV-C374 / K6B VP-70C .....                  | 18 |
| K6B IP-4TU / K6B LP-S700MF .....             | 19 |
| K6B LP-70D / K6B GP-70K / KC-MC30 [D1] ..... | 20 |
| KU-P100INT / KU-F100 / KD-8P .....           | 21 |
| KU-P100GW / KD-10DM .....                    | 21 |

## 04

### VIDEOPHONE

#### 4 WIRE

|                                                |    |
|------------------------------------------------|----|
| KCV-S701EBC .....                              | 23 |
| KIP-32GU / KVS-W10P .....                      | 24 |
| KGP-W701U / KLP-W35 .....                      | 25 |
| KVL-WR06 / KVL-WX08 / KEL-WX012 .....          | 25 |
| KC-S81MU / KC-W81U / HU-DA .....               | 26 |
| KCV-X101K .....                                | 27 |
| KCV-T701SM .....                               | 28 |
| KCV-X701EB .....                               | 29 |
| KCV-504 / D504 [D1] .....                      | 30 |
| KCV-464 / D464 [D1] .....                      | 31 |
| KIP-32G .....                                  | 32 |
| KLP-C420/C420R[D1] / KDP-602GD .....           | 34 |
| KAM-D340 [D1] / KVS-A4P / A8P .....            | 35 |
| KVL-C302i/C303i/C304i/TC306i/TC308i [D1] ..... | 36 |
| KDP-X602Gi .....                               | 37 |
| KC-MC30M / KC-S81M2 .....                      | 38 |
| KC-MC24M / KC-MC20M .....                      | 38 |
| KC-R80ED · E81ED / KC-S81M[D1] .....           | 39 |
| KC-MC24[D1] / KC-MC20[D1] .....                | 39 |

#### 2 WIRE

|                                 |    |
|---------------------------------|----|
| KCV-D372[D1] .....              | 40 |
| KC-MC32[D1] / KC-MC11[D1] ..... | 41 |

## 05

### INTERPHONE DOORPHONE

|                                     |    |
|-------------------------------------|----|
| KDP-Q81F / KD-Q81T .....            | 43 |
| KAL-S302/S303/S304/T306/T308 .....  | 44 |
| KEL-A308/AT316 .....                | 44 |
| KIP-304 .....                       | 44 |
| KDP-601A/KDP-601D .....             | 45 |
| KDP-602A/KDP-602D .....             | 45 |
| DS-2D / MS-2D .....                 | 46 |
| MSD-1B/MSD-2B/MSD-3B/MSD-4B .....   | 47 |
| KIP-601P / IP-201P .....            | 48 |
| KIP-605PG / KIP-611PG / DS-4M ..... | 49 |
| KIP-612ML / KIP-620ML .....         | 51 |
| KIP-300 / DS-2C .....               | 52 |
| KIC-301/304/308/300S .....          | 53 |

## 06

### POWER SUPPLY

|                              |    |
|------------------------------|----|
| KDPS-12V075A220 .....        | 55 |
| PA-120150S (12V DC) .....    | 55 |
| KPL-040M-VI (24V DC) .....   | 56 |
| KPL-040H-VI (15V DC) .....   | 56 |
| MKC-0600450HUK (6V DC) ..... | 56 |



01.

# IP VIDEOPHONE

HOME IOT SECURITY FUNCTIONS  
MAKE YOUR LIFE SMARTER.



IP VIDEOPHONE IP VIDEOPHONE

## KCV-S701IPOE

BLACK

WHITE


### PRODUCT FUNCTION

- 7" Full touch color LCD Monitor
- Applied graphic user interface(GUI)
- Fully digital system
- Answer the door from anywhere with mobile app (KOCOM Home)
- Power over ethernet (PoE)
- Expandible up to 4 monitors, 2 doorcameras and 2 CCTV cameras
- Auto still image capture(MAX. 50 cuts)
- 'DO NOT DISTURB' and 'ABSENT MODE' available
- Share access

### SPECIFICATIONS

|                   |                                            |
|-------------------|--------------------------------------------|
| Display           | 7 inch Color LCD                           |
| Power source      | PoE DC48V (IEEE 802.3af)                   |
| Power consumption | 3W(±20%)(On stand by), 7W(±20%)(Full load) |
| Wiring            | LAN: UTP CAT5e or Higher                   |
| Mount type        | Surface mount                              |
| Dimension         | 197(W) x 176(H) x 23(D)mm                  |

### WIRING DIAGRAM

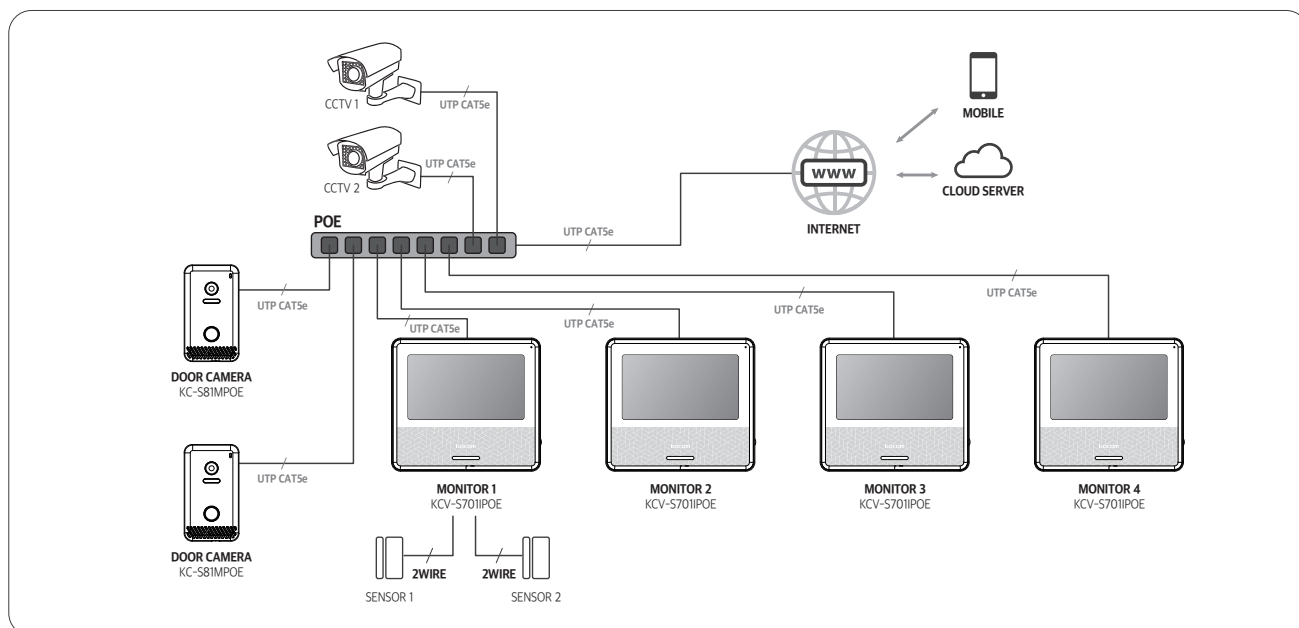



## IP VIDEOPHONE DOORCAMERA

### KC-S81MPOE

#### PRODUCT FUNCTION

- Metal body
- 1 Mega pixel
- White LED for visitor recognition at night
- Call and video communication with monitor
- Doorlock interface

#### SPECIFICATIONS

|                   |                          |
|-------------------|--------------------------|
| Power source      | PoE DC48V (IEEE 802.3af) |
| Power consumption | 3W(Max)                  |
| Wiring            | LAN: UTP CAT5e or Higher |
| Body material     | Metal A/L                |
| Mount type        | Surface mount            |
| Camera angle      | Diagonal 110°            |
| Dimesion          | 70(W) x 125(H) x 21(D)mm |

## IP VIDEOPHONE POE SWITCH

### AI PoE Switch (4Port / 8Port)

#### SPECIFICATIONS (4 Port)

|                      |                                                       |
|----------------------|-------------------------------------------------------|
| <b>I/O Interface</b> |                                                       |
| Power source         | Input : AC 100-240V, 50/60Hz                          |
| Ethernet             | 4Port 10/100Mbps PoE+2Port 10/100Mbps Ethernet Uplink |
| <b>Performance</b>   |                                                       |
| Bandwidth            | 1.2Gbps                                               |
| Throughput           | 0.8928Mpps                                            |
| Packet Buffer        | 448K                                                  |
| MAC Address          | 1K                                                    |
| Jumbo Frame          | 2Kbytes                                               |
| Transfer Mode        | Store and forward                                     |
| MTBF                 | 100000hour                                            |

#### SPECIFICATIONS (8 Port)

|                      |                                                       |
|----------------------|-------------------------------------------------------|
| <b>I/O Interface</b> |                                                       |
| Power source         | Input : AC 100-240V, 50/60Hz                          |
| Ethernet             | 8Port 10/100Mbps PoE+2Port 10/100Mbps Ethernet Uplink |
| <b>Performance</b>   |                                                       |
| Bandwidth            | 2Gbps                                                 |
| Throughput           | 1.488Mpps                                             |
| Packet Buffer        | 448K                                                  |
| MAC Address          | 2K                                                    |
| Jumbo Frame          | 2048bytes                                             |
| Transfer Mode        | Store and forward                                     |
| MTBF                 | 100000hour                                            |

## MAKING YOUR HOME MORE CONVENIENT AND SAFER

### KOCOM Home APP

#### DEVICE CONTROL

Smart devices linked to the app can be easily controlled and managed with one app.



#### SMART CALL

It is possible to receive calls from visitors anytime, anywhere on your smartphone and make video communication.



#### SMART DOOR OPEN

Even if you are outside, you can check visitors through the app and open the door.





# IP VIDEOPHONE IP VIDEOPHONE

## KCV-S701IP2W




### PRODUCT FUNCTION

- 7" Full touch color LCD Monitor
- Applied graphic user interface (GUI)
- Fully digital system
- Answer the door from anywhere with mobile app (KOCOM Home)
- Expandible up to 4 monitors, 2 doorcameras and 2 CCTV cameras
- Auto still image capture (MAX. 50 cuts)
- 'DO NOT DISTURB' and 'ABSENT MODE' available
- Share access

### SPECIFICATIONS

| Model No.         | KCV-S701IP2W DC                                        | KCV-S701IP2W AC     |
|-------------------|--------------------------------------------------------|---------------------|
| Display           | 7 inch Color LCD                                       |                     |
| Power source      | DC 24V $\pm$ 3V 1A                                     | 100V-240V~, 50/60Hz |
| Power consumption | 3W( $\pm$ 20%)(On stand by), 7W( $\pm$ 20%)(Full load) |                     |
| WiFi              | IEEE 802.11 g/n                                        |                     |
| Wiring            | Doorcamera : 2 wire (Non polarized)                    |                     |
| Mount type        | Surface mount                                          |                     |
| Dimension         | 197(W) x 176(H) x 23(D)mm                              |                     |

### WIRING DIAGRAM

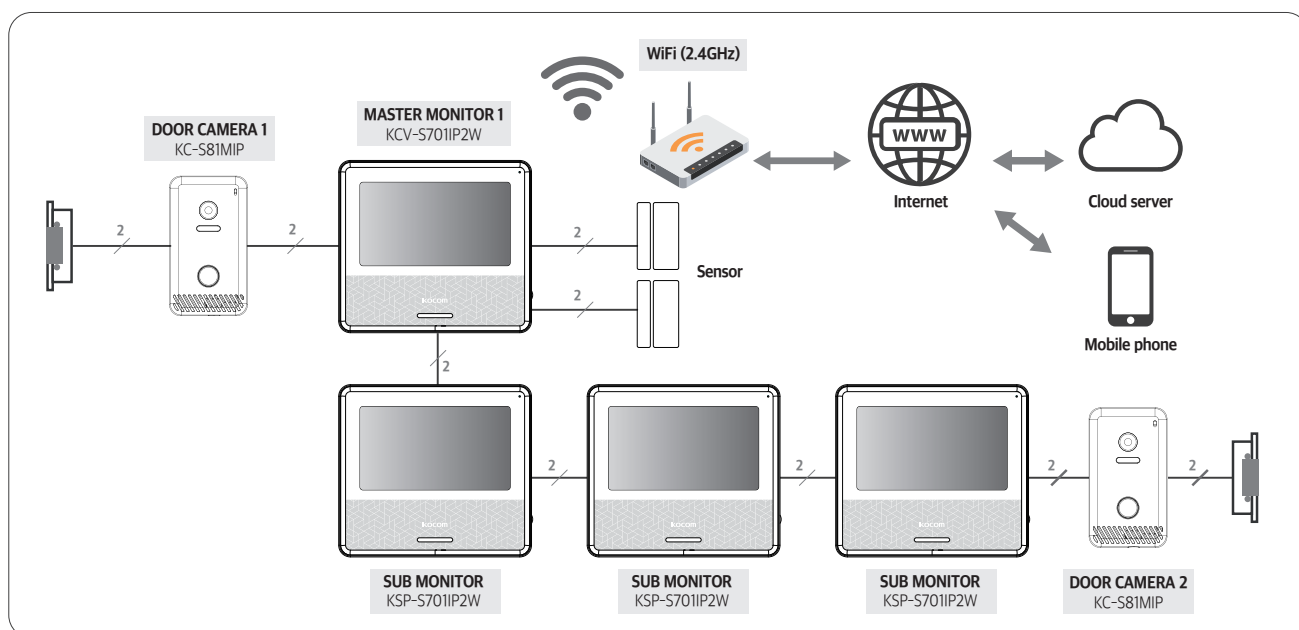



## IP VIDEOPHONE DOORCAMERA

**KC-S81MIP****PRODUCT FUNCTION**

- Metal body
- 1 Mega pixel
- White LED for visitor recognition at night
- Call and video communication with monitor
- Doorlock interface

**SPECIFICATIONS**

|                   |                               |
|-------------------|-------------------------------|
| Power source      | DC 27±2V (Power from monitor) |
| Power consumption | 3W(Max)                       |
| Body material     | Metal A/L                     |
| Mount type        | Surface mount                 |
| Camera angle      | Diagonal 110°                 |
| Dimesion          | 70(W) x 125(H) x 21(D)mm      |

MAKING YOUR HOME MORE CONVENIENT AND SAFER

**2-Wire wiring diagram****KEY POINT !**

With just 1 power cord and two-wires wiring, enjoy the most comfortable WiFi IP videophone operating 4 monitors and 2 cameras



MAKING YOUR HOME MORE CONVENIENT AND SAFER

## KCV-S701IPOE / KCV-S701IP2W LINKED PRODUCTS (SHARE ACCESS BY APP)

HEMOCAM WiFi HEMOCAM

### KC-K6(3MP-FHD)



#### PRODUCT FUNCTION

- Lens : 3.6mm fixed lens, IR double filter switch, 8-10m effective infrared distance
- PTZ control 360°
- Two-way audio
- Auto tracking / human detection
- Support Max 128GB TF card / Cloud storage
- Alarm push
- Motion detection
- Night vision

SENSOR WiFi TEMPERATURE AND HUMIDITY SENSOR

### KDY-WSD400B



#### PRODUCT FUNCTION

- Battery : Powered by AAA\*2 batteries
- Detection temperature : -10°C~55°C
- Detection humidity : 0-99%RH
- Alarm sound pressure : 55dB
- Installation method : Wall mounted
- Working temperature : -10°C~60°C
- Working humidity: Maximum 90%RH

SENSOR WiFi PIR MOTION SENSOR

### KDY-HW400A



#### PRODUCT FUNCTION

- Battery : Powered by CR123A battery\*1
- Detection distance : 10M
- Detection angle : 110°
- Installation method : Bracket mounting
- Operating temperature : -10~50°C
- Working humidity : Up to 95% RH

SENSOR WiFi MAGNET SENSOR

### KDY-MC400B



#### PRODUCT FUNCTION

- Battery : Powered by AAA\*2 batteries
- Magnetic control distance : ≥15mm
- Working temperature : -10~50°C
- Working humidity : Max 95%RH

LED WiFi SMART LED

### KA60




#### PRODUCT FUNCTION

- Watt(w) : 10W / Input voltage : 100V ~ 240V
- WiFi : 802.11b/g/n(2.4GHz)
- Lumen(lm) : 806
- CCT(K) : 2700~6500
- Beam angle : 240°
- Base : E26/E27


## KOCOM HOME makes my own convenient rules

Record your repeated daily life pattern to build more convenient your own daily routine.  
From tiny parts of your life routine to the temperature, humidity, and the lights that you need.  
KOCOM makes your life happier, safer, and more convenient by connecting with your house and life.  
Make your own life routine with KOCOM.

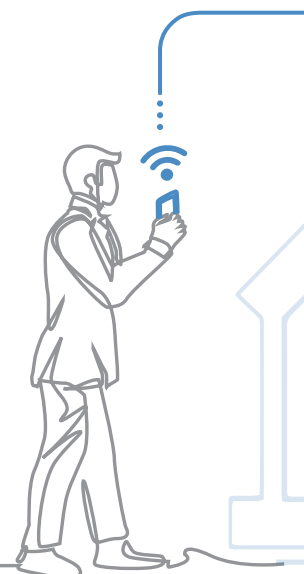

# KOCOM HOME makes our lives more convenient

KOCOM HOME technology serves a safer life for our family and makes each day of our lives more convenient

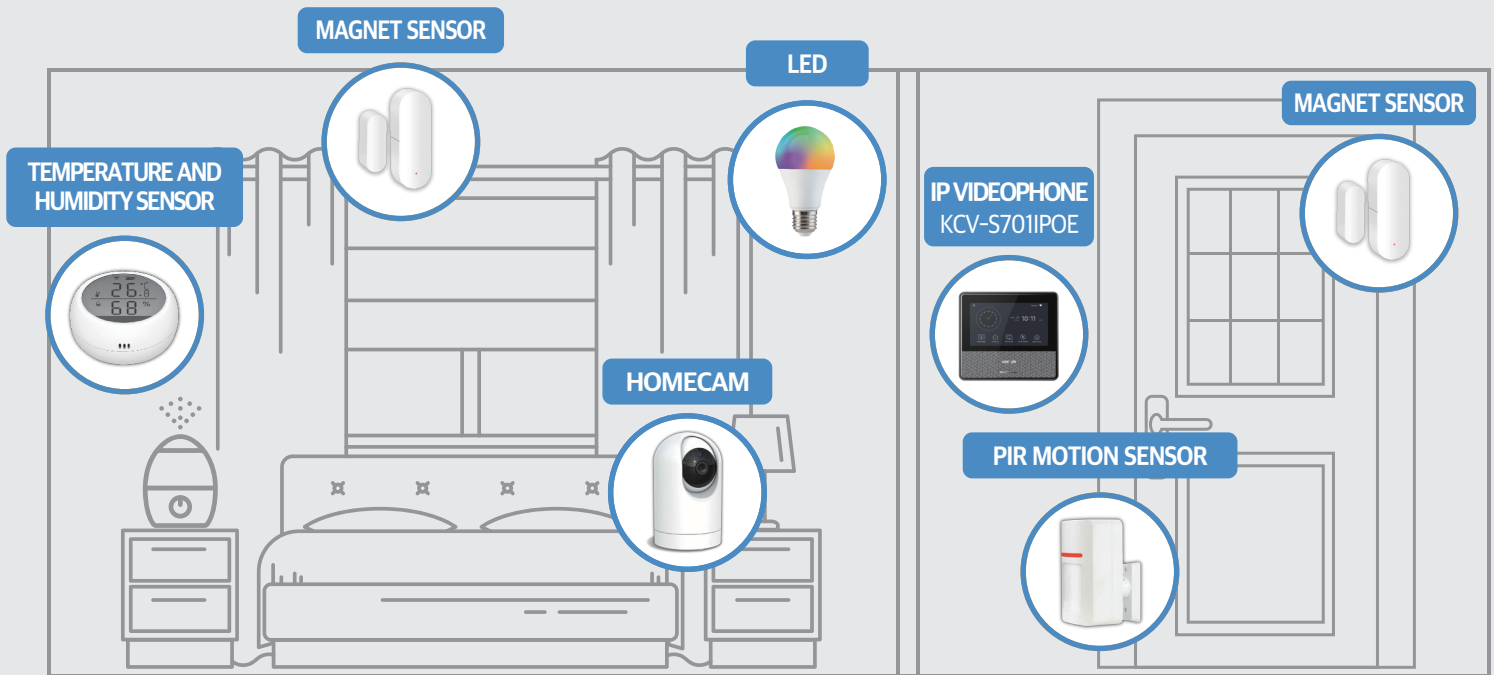

## Shortcut function button

### AWAY MODE

- Short keys for immediate activation/ Deactivation
- : Activate and deactivate away mode via smartphone

### SMART SOCKET

- Short keys for immediate activation/ Deactivation
- : ON/OFF buttons on main screen

### FEED DISPENSER

- Short keys for immediate activation/ Deactivation
- : ON/OFF buttons on main screen

## Other function description

### OTHER FUNCTION

- Enable to communicate with visitors, record videos, and capture screens by smartphones. (Also allow the functions when the phone is not on the line)
- Enable to monitor in full of all cameras registered to the smartphone. (Including the front doorcamera) (4ch, 9ch, and 16ch)
- Enable to live-monitor the front door connected with camera via smartphones.
- Monitor siren function when away mode is activated / Monitor password unlock function.
- Push notification : In the event of setting value changes, push notification alerts on smartphones.






02.

# SMART HOME SYSTEM

# SMART WALL-PAD

## DIAGRAM

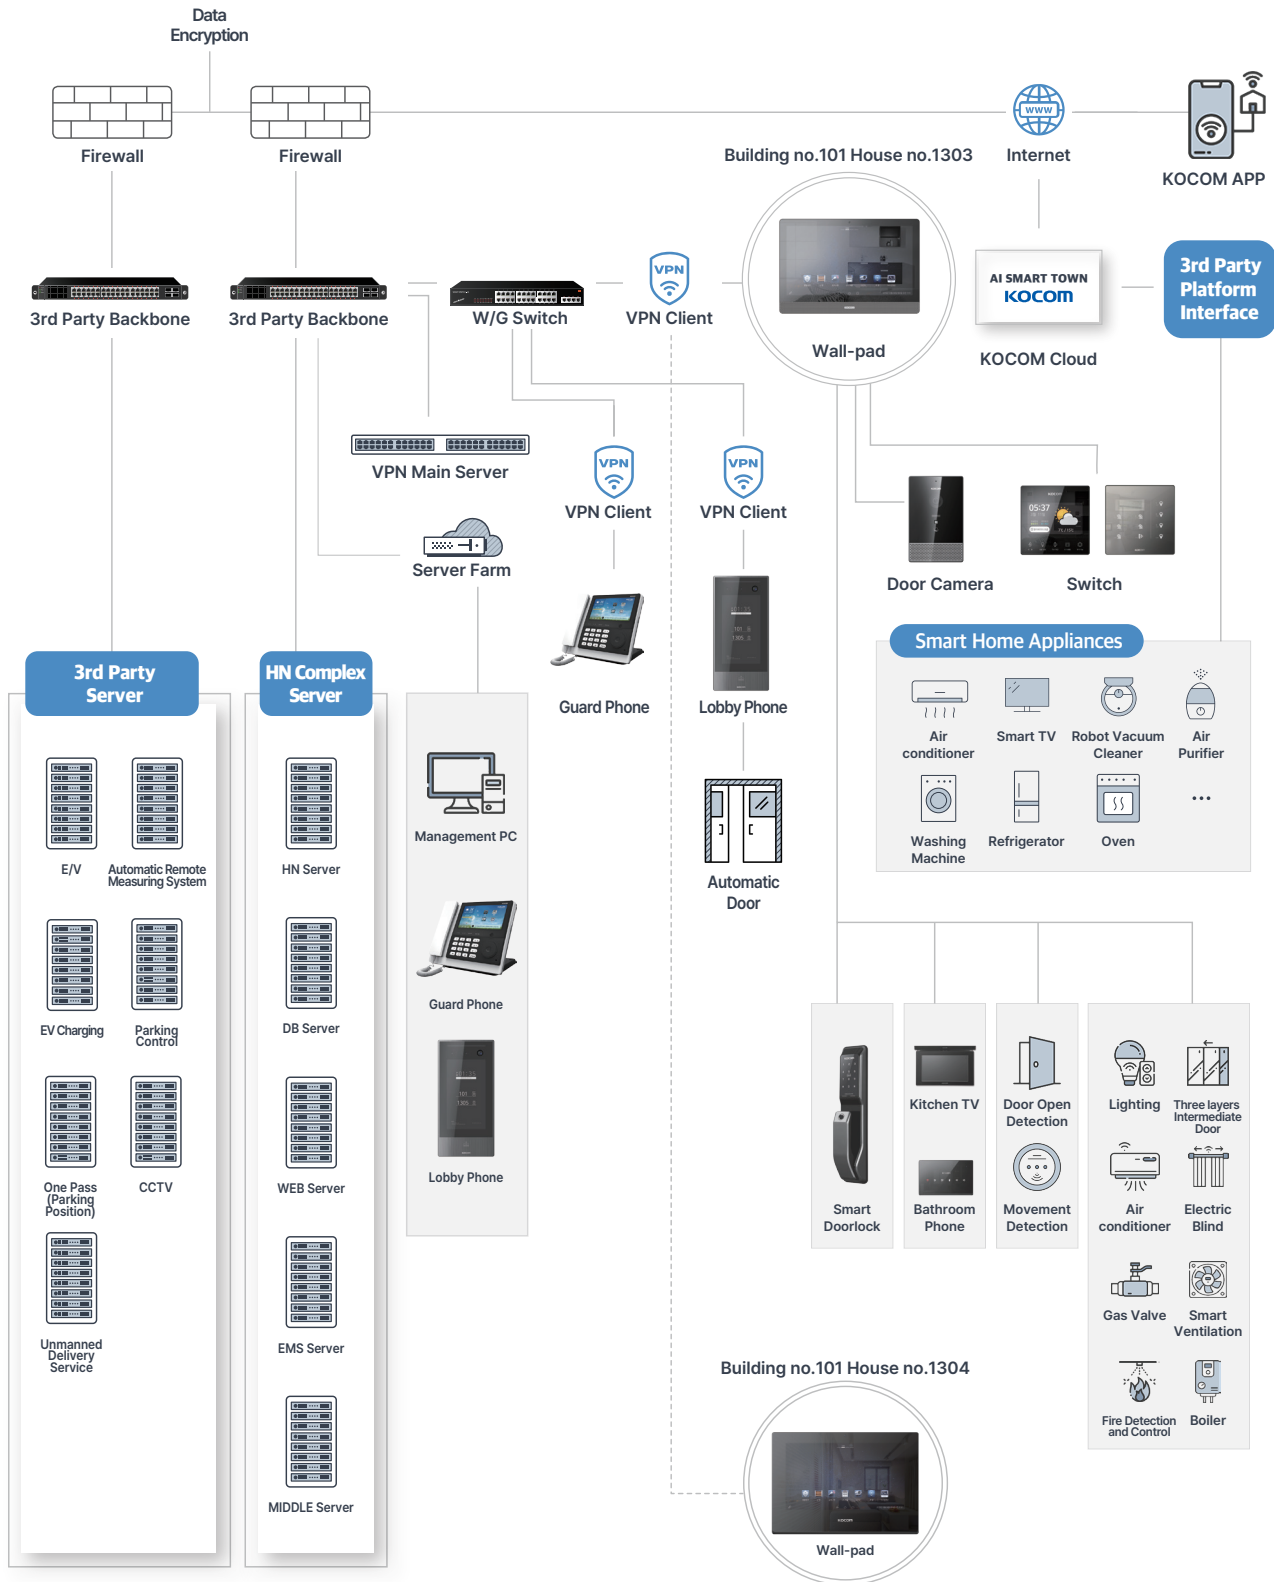



## SMART HOME SYSTEM 24inch SMART MIRROR WALL-PAD

# KSM-W240M

### PRODUCT FUNCTION

- 24" Full touch color LCD Monitor
- Home appliances control function  
(Air conditioner/air purifier and other smart home appliances)
- Connection with TV in the kitchen, Bathroom phone /  
Compatible with Gas detection, Crime prevention systems
- Heating control, Lighting control available (Option)
- Household emergency notification function (SMS) (Option)
- Intrusion detection and alarm function when you're absent
- Alarm function and automatic notification to the security office in the event of an emergency
- UI offering two different types: Mirror mode and Wall pad mode
- Digital album function to display photos and other messages

### SPECIFICATIONS

|                      |                           |
|----------------------|---------------------------|
| Display              | 24 inch IPS LCD           |
| Power source         | AC 100~240V / 60Hz        |
| Flash memory         | 16Gbyte                   |
| Communication system | Hands-free type           |
| Wireless             | Wi-Fi, Bluetooth, Zigbee  |
| Mount type           | Flush mount               |
| Dimension            | 340(W) x 580(H) x 15(D)mm |

※ For the purpose of product improvement and quality enhancement, changes may be made without prior notice.





## SMART HOME SYSTEM 13inch WALL-PAD

# KHN-T130T9

### PRODUCT FUNCTION

- 13.3" Full touch color LCD Monitor
- Connection with TV in the kitchen, Bathroom phone / Compatible with Gas detection, Crime prevention systems
- Heating control, Lighting control available (Option)
- Household emergency notification function (SMS) (Option)
- Intrusion detection and alarm function when you're absent
- Alarm function and automatic notification to the security office in the event of a emergency

### SPECIFICATIONS

|                      |                          |
|----------------------|--------------------------|
| Display              | 13.3 inch IPS LCD        |
| Power source         | DC 12V / 2A              |
| Flash memory         | 8Gbyte                   |
| Communication system | Hands-free type          |
| Wireless             | Wi-Fi, Bluetooth, Zigbee |
| Mount type           | Flush mount              |
| Dimension            | 336(W) x 234(H) x 9(D)mm |





## SMART HOME SYSTEM 10inch WALL-PAD

# KHN-T100M9

### PRODUCT FUNCTION

- 10" Full touch color LCD Monitor
- Connection with TV in the kitchen, Bathroom phone / Compatible with Gas detection, Crime prevention systems
- Heating control, Lighting control available (Option)
- Household emergency notification function (SMS) (Option)
- Intrusion detection and alarm function when you're absent
- Alarm function and automatic notification to the security office in the event of a emergency

### SPECIFICATIONS

|                      |                          |
|----------------------|--------------------------|
| Display              | 10 inch IPS LCD          |
| Power source         | DC 12V / 2A              |
| Flash memory         | 8Gbyte                   |
| Communication system | Hands-free type          |
| Wireless             | Wi-Fi, Bluetooth, Zigbee |
| Mount type           | Flush mount              |
| Dimension            | 274(W) x 191(H) x 9(D)mm |



## SMART HOME FACE RECOGNITION DOORCAMERA


### KFC-X43W

#### PRODUCT FUNCTION

- Easy facial recognition
- Face registration with higher security level
- Identification of duplicates (Photos and Videos)
- Access control through facial recognition
- Visitor notification message function
- Registration of members: Face registration of up to 30 people
- Returning home mode and black box function available
- Display a message when a visitor approaches
- Facial recognition message and control function are activated when returning to home

#### SPECIFICATIONS

|                       |                             |
|-----------------------|-----------------------------|
| Display               | 4.3 inch LCD                |
| Power source          | DC 12V                      |
| Camera pixel          | 2 Mega pixel (AHD)          |
| Mount type            | Flush mount                 |
| Operating temperature | -10°C ~ +50°C               |
| Angle of lens         | Diagonal 90°                |
| Dimension             | 120(W) x 192.3(H) x 19(D)mm |

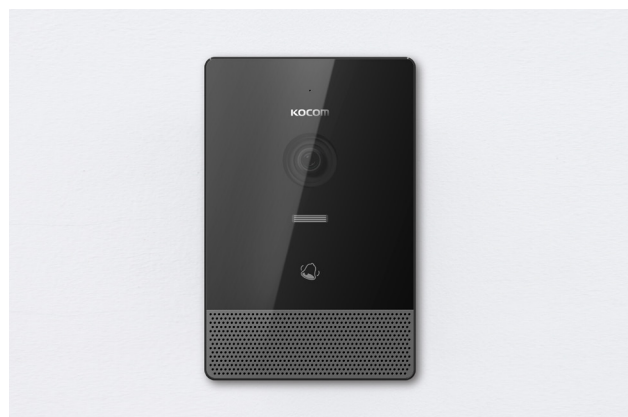

## SMART HOME DOORCAMERA

### KC-T80T9

#### PRODUCT FUNCTION

- Call to household
- Video transmission of visitors
- Touch-method call button
- Built-in LED light
- Voice volume control function

#### SPECIFICATIONS

|                       |                           |
|-----------------------|---------------------------|
| Display               | None                      |
| Power source          | DC 12V                    |
| Camera pixel          | 2 Mega pixel (AHD)        |
| Mount type            | Flush mount               |
| Operating temperature | -10°C ~ +50°C             |
| Angle of lens         | Diagonal 55°              |
| Dimension             | 102(W) x 160(H) x 15(D)mm |



## SMART HOME FACE RECOGNITION LOBBYPHONE

### ASTRO KLP-U100F

#### PRODUCT FUNCTION

- Easy facial recognition
- Face registration with higher security level
- Identification of duplicates (photos and videos)
- Access control through facial recognition
- Visitor notification message function
- 10inch full touch LCD applied
- IPS panel applied
- Excellent identification and recognition even in low light
- Selectable whether to detect mask or not
- Up to 20,000 faces can be registered

#### SPECIFICATIONS

|                       |                                     |
|-----------------------|-------------------------------------|
| Display               | 10 inch IPS LCD                     |
| Power source          | DC 13V / 3A                         |
| Camera pixel          | CMOS 2 Mega pixel                   |
| Access                | Face recognition, Password, RF card |
| Mount type            | Flush mount                         |
| Operating temperature | -10°C ~ +50°C                       |
| Angle of lens         | Diagonal 168°                       |
| Dimension             | 180(W) x 373(H) x 16(D)mm           |



## SMART HOME GUARDPHONE

### ASTRO KGP-70KA

#### PRODUCT FUNCTION

- 7" LCD Screen
- Audio communication with monitor, Lobbyphone and extened Guardphone
- Lobbyphone image display and door opening
- Household number display(call and event)
- GUI interface
- Time setting and display

#### SPECIFICATIONS

|                   |                                 |
|-------------------|---------------------------------|
| Display           | 7 inch TFT LCD                  |
| Power source      | DC 24V±1V                       |
| Power consumption | 4W(On stand by), 11W(Full load) |
| Wiring            | System: 8 Wires(UTP)            |
| Mount type        | Desktop / Wall-hanging          |
| Dimension         | 257(W) x 225(H) x 53(D)mm       |

# 03.


## ONE UTP SOLUTION

KOCOM's ONE UTP SOLUTION offers a convenient and safe housing life anywhere by connecting various digital devices with networks.

Easy installation - Easy diagram, Easy wiring, Easy management Extended wiring distance -  
With Good Video quality. Maximize UTP video wiring distance : 550m

# ONE UTP SOLUTION

## DIAGRAM

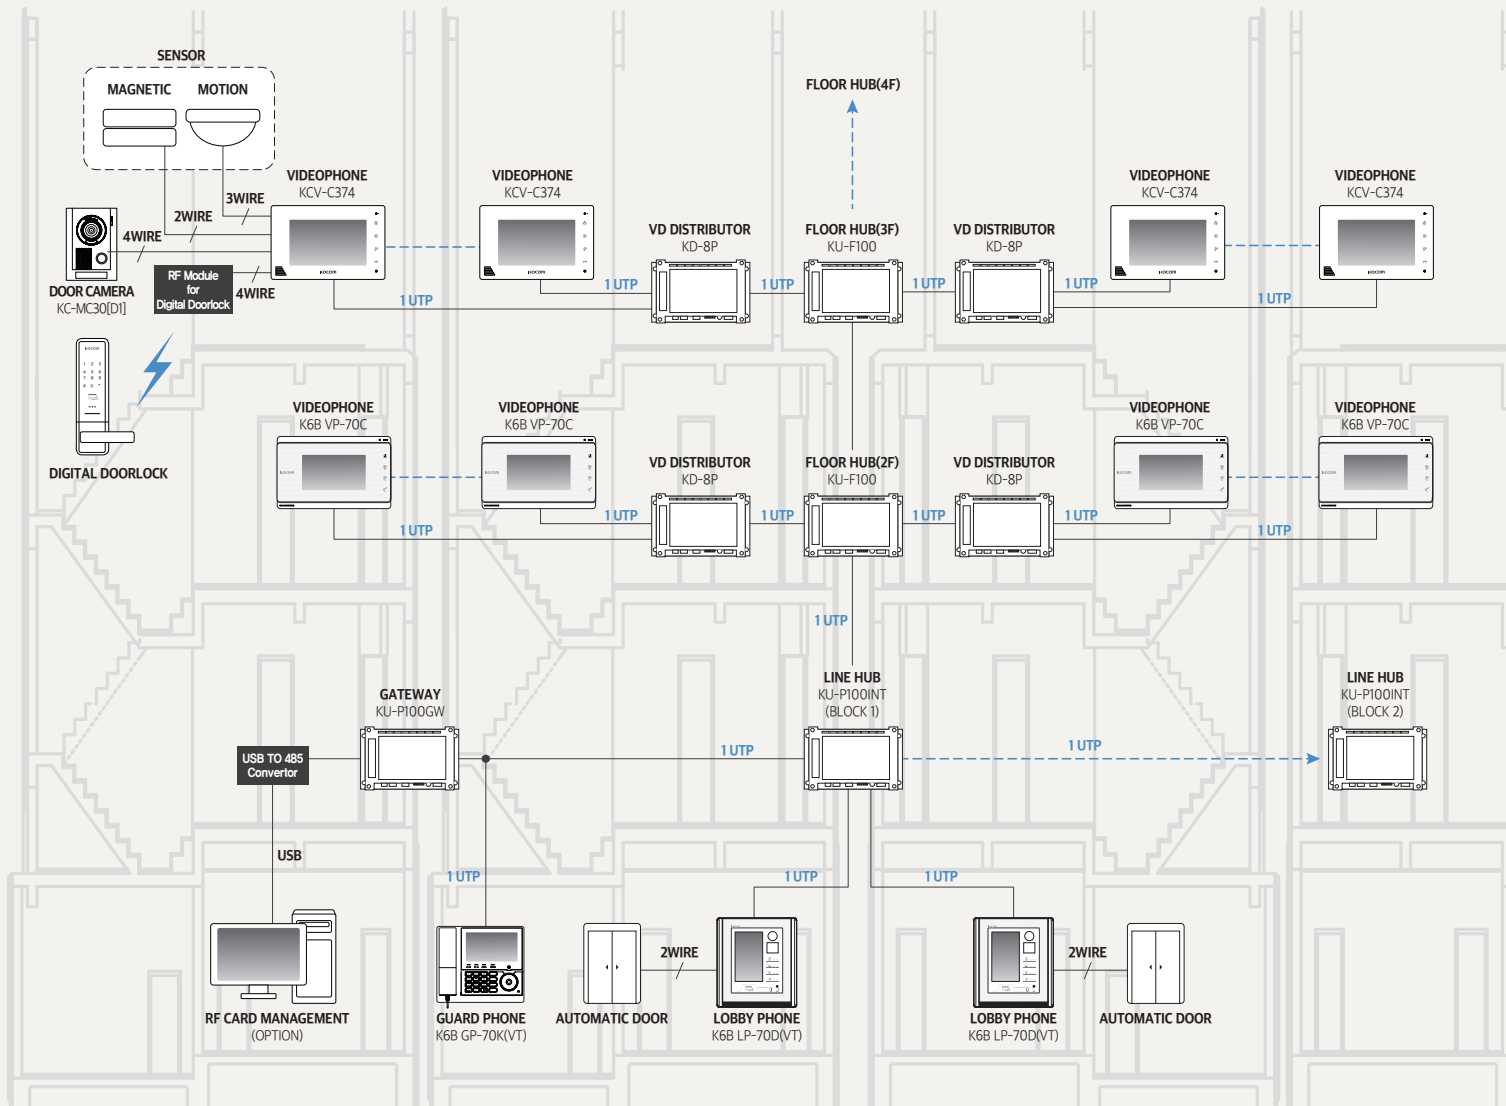

### Why One UTP solution (LineHUB)

- Easy installation  
Easy diagram, Easy wiring, Easy management
- Extended wiring distance  
With good video quality  
Maximize UTP video wiring distance : 450m

### Maximum wiring distance

1. Lobbyphone to KU-P100INT : 50m
2. KU-P100INT to GP-70K : 100m
3. KU-P100INT to KU-F100 : 300m
4. KU-F100 + KD-8P + Videophone : 100m
5. KU-P100INT(GP-70K) and Last KU-P100INT(GP-70K) : 800m  
KU-P100GW and Last KU-P100INT(GP-70K) : 800m
6. PC to KU-P100GW : 10m
7. Lobbyphone to Last monitor : 450m

※ Maximize UTP video wiring distance : 450m

### Max. system configuration

1. Line HUB : 30 pcs
2. Floor HUB : 50 pcs
3. VD Distributor per a floor HUB : 4pcs
4. Monitor per a VD distributor : 8pcs
5. Lobbyphone : 99pcs
6. Guardphone : 50pcs
7. Gateway : 1pcs





## ONE UTP SOLUTION MONITOR KCV-C374 UPGRADE



### PRODUCT FUNCTION

- 7" Color digital LCD Monitor
- Video communication with Doorcamera, Guardphone and Lobbyphone
- Doorcamera and Lobbyphone monitoring
- Operating condition display with Icons(OSD)
- Touch buttons for control
- Connection up to 2 Monitors
- Door open(Doorcamera, Lobbyphone)

### SPECIFICATIONS

|                   |                                                                                     |
|-------------------|-------------------------------------------------------------------------------------|
| Display           | 7 inch Color LCD                                                                    |
| Power source      | AC 100~240V, 50/60Hz                                                                |
| Power consumption | 2W(On stand by), 10W(Full load)                                                     |
| Wiring            | System: 8 Wires(UTP)<br>Lobby video: 2 Wires(UTP or Coaxial)<br>Doorcamera: 4 Wires |
| Mount type        | Surface mount                                                                       |
| Dimension         | 222(W) x 144(H) x 33(D)mm                                                           |

### COMPATIBLE PRODUCTS



## ONE UTP SOLUTION MONITOR K6B VP-70C



### PRODUCT FUNCTION

- 7" Color digital LCD Monitor
- Video communication with Doorcamera, Guardphone and Lobbyphone
- Doorcamera and Lobbyphone monitoring
- Operating condition display with Icons(OSD)
- Touch buttons for control
- Connection up to 2 Monitors
- Door open(Doorcamera, Lobbyphone)

### SPECIFICATIONS

|                   |                                                                                     |
|-------------------|-------------------------------------------------------------------------------------|
| Display           | 7 inch Color LCD                                                                    |
| Power source      | AC 100~240V, 50/60Hz                                                                |
| Power consumption | 1.5W(On stand by), 13W(Full load)                                                   |
| Wiring            | System: 8 Wires(UTP)<br>Lobby video: 2 Wires(UTP or Coaxial)<br>Doorcamera: 4 Wires |
| Mount type        | Surface mount                                                                       |
| Dimension         | 271(W) x 173(H) x 26(D)mm                                                           |

### COMPATIBLE PRODUCTS



## ONE UTP SOLUTION DOORPHONE

**K6B IP-4TU****PRODUCT FUNCTION**

- Audio communication with Outdoor panel, Guardphone and Lobbyphone
- Connection up to 3 doorphones
- Door Open (Outdoor panel, Lobbyphone)

**SPECIFICATIONS**

|                   |                                                |
|-------------------|------------------------------------------------|
| Power source      | AC 100~240V, 50/60Hz                           |
| Power consumption | 1.2W(On stand by), 4W(Full load)               |
| Wiring            | System: 8 Wires(UTP)<br>Outdoor panel: 2 Wires |
| Mount type        | Surface mount                                  |
| Dimension         | 97.3(W) x 202(H) x 53.5(D)mm                   |

**COMPATIBLE PRODUCTS**

LOBBYPHONE  
K6B LP-S700MF



LOBBYPHONE  
K6B LP-70D



GUARDPHONE  
K6B GP-70K



## ONE UTP SOLUTION LOBBYPHONE


**K6B LP-S700MF****PRODUCT FUNCTION**

- Access control through face recognition
- 7" LCD Screen
- 2 Mega pixels high-definition camera module for face recognition
- Video communication with mointor and Guardphone
- Doorlock interface and RF card(13.56 MHz) registration/deletion
- Individual household and common password can be set separately
- Easy to operate using touch 15 key
- Camera and button backlight at night
- Camera angle adjustable
- DVR video output port available

**SPECIFICATIONS**

|                   |                                   |
|-------------------|-----------------------------------|
| Display           | 7 inch Color LCD                  |
| Power source      | DC 24V±1V                         |
| Power consumption | 7.5W(On stand by), 12W(Full load) |
| Wiring            | System: 8 Wires(UTP)              |
| Mount type        | Flush mount                       |
| Dimension         | 235(W) x 300(H) x 15(D)mm         |



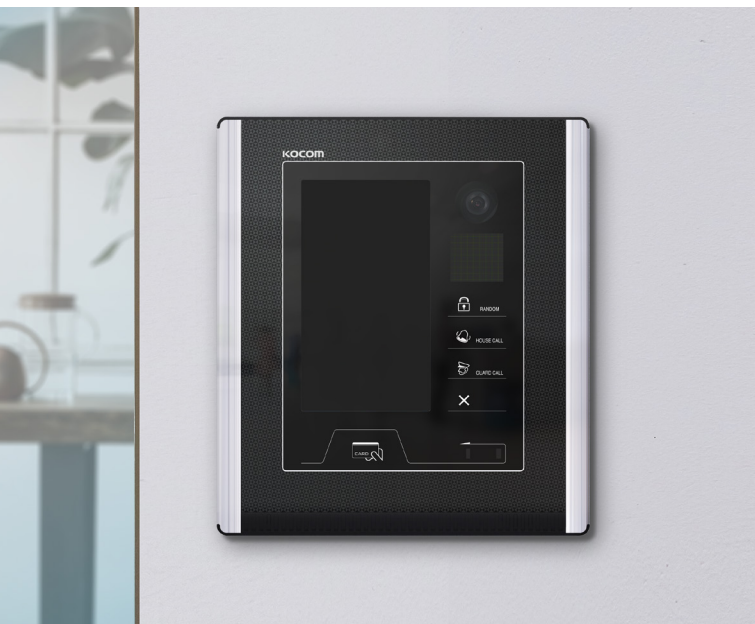

## ONE UTP SOLUTION LOBBYPHONE

### K6B LP-70D

#### PRODUCT FUNCTION

- 7" LCD Screen
- Video communication with Monitor and Guardphone
- Doorlock interface and RF card(13.56 MHz) registration/deletion
- Individual household and common password can be set separately
- Expandable up to 99 units per block  
(In/out connection between lobbyphones in 50 meters using CAT6 cable)
- Camera and button backlight at night
- Camera angle adjustable
- DVR video output port available

#### SPECIFICATIONS

|                   |                                     |
|-------------------|-------------------------------------|
| Display           | 7 inch Color LCD                    |
| Power source      | DC 24V±1V                           |
| Power consumption | 3.6W(On stand by), 10.8W(Full load) |
| Wiring            | System: 8 Wires(UTP)                |
| Mount type        | Flush mount                         |
| Dimension         | 248(W) x 279(H) x 15(D)mm           |



## ONE UTP SOLUTION GUARDPHONE

### K6B GP-70K

#### PRODUCT FUNCTION

- 7" LCD Screen
- Audio communication with Monitor, Lobbyphone and extened guardphone
- Lobbyphone image display and door opening
- Household number display (Call and event.)
- GUI interface
- Time setting and display

#### SPECIFICATIONS

|                   |                                |
|-------------------|--------------------------------|
| Display           | 7 inch Color LCD               |
| Power source      | DC 12V±1V                      |
| Power consumption | 3W(On stand by), 8W(Full load) |
| Wiring            | System: 8 Wires(UTP)           |
| Mount type        | Desktop / Wall-hanging         |
| Dimension         | 257(W) x 225(H) x 53(D)mm      |



## ONE UTP SOLUTION DOORCAMERA

### KC-MC30[D1] UPGRADE

#### PRODUCT FUNCTION

- Metal body
- High quality video
- White LED for visitor recognition at night
- Call and video communication with Monitor
- Doorlock interface

#### SPECIFICATIONS

|                   |                                 |
|-------------------|---------------------------------|
| Power             | DC 12V±1V(Powered from monitor) |
| Power consumption | 3W(Max)                         |
| Wiring            | 4 Wires                         |
| Body material     | Metal A/L                       |
| Mount type        | Surface mount                   |
| Camera angle      | Diagonal 90°(Angle adjustable)  |
| Min. Illumination | 0.1 lux(LED ON)                 |
| Dimesion          | 110(W) x 158(H) x 39(D)mm       |

ONE UTP SOLUTION BUILDING DISTRIBUTOR

**KU-P100INT** (LINE HUB)**SPECIFICATIONS**

|              |                          |
|--------------|--------------------------|
| Power source | DC 14V                   |
| Wiring       | UTP                      |
| Mount type   | Surface mount            |
| Dimension    | 145(W) x 90(H) x 45(D)mm |

ONE UTP SOLUTION FLOOR DISTRIBUTOR

**KU-F100** (FLOOR HUB)**SPECIFICATIONS**

|              |                          |
|--------------|--------------------------|
| Power source | DC 14V                   |
| Wiring       | UTP                      |
| Mount type   | Surface mount            |
| Dimension    | 145(W) x 90(H) x 45(D)mm |

ONE UTP SOLUTION FLAT DISTRIBUTOR

**KD-8P** (8 PORT VIDEOPHONE DISTRIBUTOR)**SPECIFICATIONS**

|              |                          |
|--------------|--------------------------|
| Power source | DC 14V                   |
| Wiring       | UTP                      |
| Mount type   | Surface mount            |
| Dimension    | 145(W) x 90(H) x 45(D)mm |

ONE UTP SOLUTION PC DISTRIBUTOR

**KU-P100GW** (GATE WAY)**SPECIFICATIONS**

|              |                          |
|--------------|--------------------------|
| Power source | DC 14V                   |
| Wiring       | UTP                      |
| Mount type   | Surface mount            |
| Dimension    | 145(W) x 90(H) x 45(D)mm |

ONE UTP SOLUTION VIDEO DISTRIBUTOR

**KD-10DM****SPECIFICATIONS**

|              |                          |
|--------------|--------------------------|
| Power source | DC 24V                   |
| Wiring       | UTP                      |
| Mount type   | Surface mount            |
| Dimension    | 145(W) x 90(H) x 45(D)mm |




# 04.

## VIDEOPHONE

High quality Life Style increasing the composure of a life!  
KOCOM Videophone makes it better

KOCOM videophone with high quality and stylish design has offered various product groups in accordance with each use for an apartment complex, a multiplex house, a villa, a single-family house and etc., and a customer may install and operate it easily and conveniently.

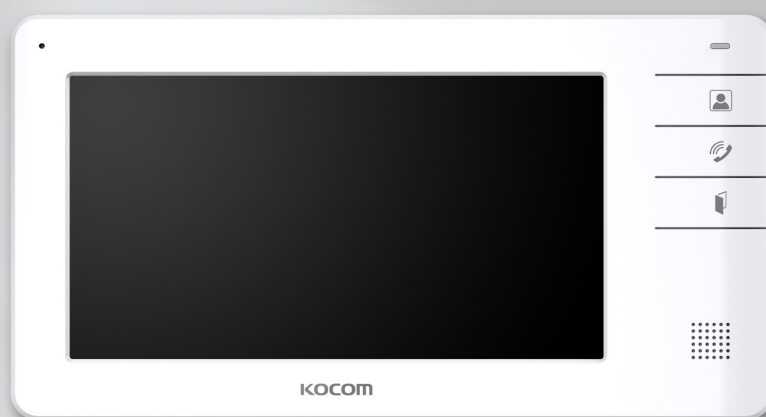

## EBC SYSTEM MONITOR

## KCV-S701EBC

## PRODUCT FUNCTION

- 7" Color digital LCD monitor
- Video communication with Doorcamera / Guardphone and Lobbyphone
- Doorcamera monitoring
- Operating condition display with Icons (OSD)
- Touch buttons for control
- Connection up to 2 Doorcameras and 4 Monitors with 4 Sub-Audio Units (KIP-32GU)
- Internal communication between indoor units
- Door open (Doorcamera)

## SPECIFICATIONS


|                   |                                                                                                                                                                                                                                      |                         |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| Model No.         | KCV-S701EBC (DC)                                                                                                                                                                                                                     | KCV-S701EBC (AC)        |
| Display           | 7 inch Color LCD                                                                                                                                                                                                                     |                         |
| Power source      | DC 15V 1.5A                                                                                                                                                                                                                          | AC 100-240V ~ 50Hz/60Hz |
| Power consumption | 1W(±20%)(On stand by), 7.5W(±20%)(Full load)                                                                                                                                                                                         |                         |
| Wiring            | Doorcamera : Polarized 4 Wires<br>Ex - Monitor : Polarized 4 Wires<br>Door opener : Polarized 3 Wires<br>Interphone : 4 Wires direct to each monitor and additional 4 Wires between monitors<br>Lobby doorcamera : Polarized 6 Wires |                         |
| Mount type        | Surface mount                                                                                                                                                                                                                        |                         |
| Dimension         | 220(W) x 123(H) x 19(DC)/22(AC) (D)mm                                                                                                                                                                                                |                         |

## COMPATIBLE PRODUCTS


DOORCAMERA  
KC-S81MUDOORCAMERA  
KC-W81UINTERPHONE  
KIP-32GULOBBYPHONE  
KLP-W350LOBBYPHONE  
KVL-W SeriesGUARDPHONE  
KGP-W701U

## KCV-S701EBC



## ■ CAMERA MODE

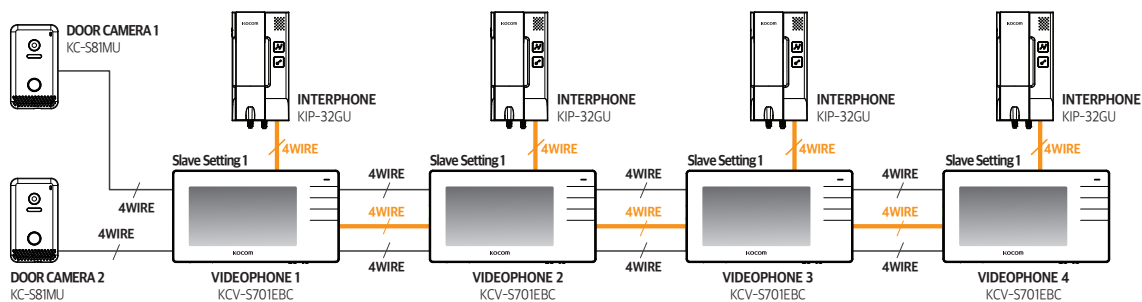

## ■ System configurations—Push button Lobbyphone

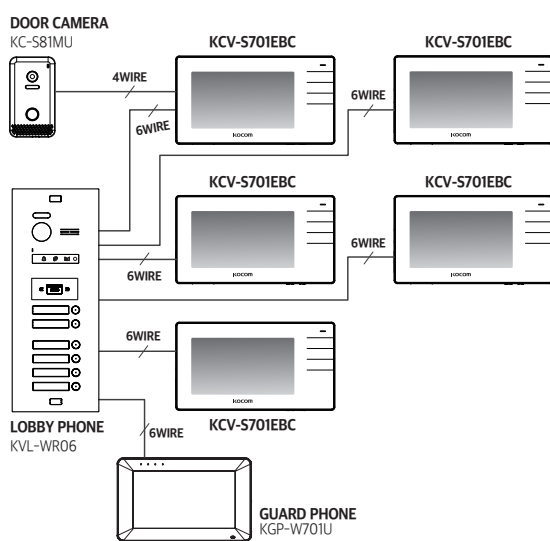

## ■ System configurations—Keypad Lobbyphone

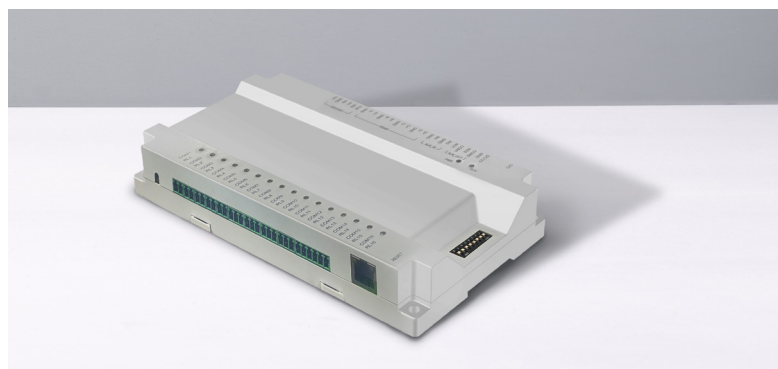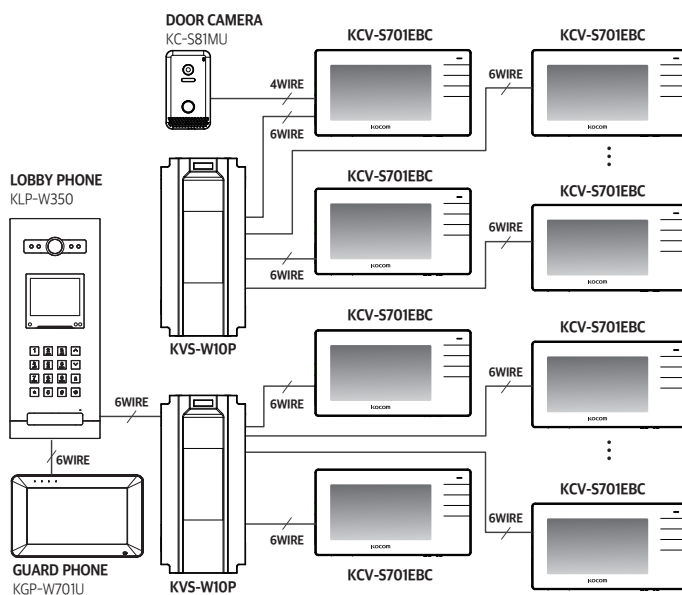

## EBC SYSTEM SUB-AUDIO PHONE

## KIP-32GU

## PRODUCT FUNCTION

- Audio communication with doorcamera and monitor
- Internal communication between indoor units

※ COMPATIBLE product: KCV-S701EBC

## SPECIFICATIONS

|              |                                   |
|--------------|-----------------------------------|
| Power source | DC 14V ±1V (Powered from monitor) |
| Mount type   | Surface mount                     |
| Dimension    | 92(W) x 176(H) x 52(D)mm          |

## EBC SYSTEM REPEATER

## KVS-W10P

## PRODUCT FUNCTION

- 10 Port repeater for KLP-W350 system

## SPECIFICATIONS

|              |                                   |
|--------------|-----------------------------------|
| Power source | DC 12V ±1V (Powered from monitor) |
| Wiring       | System : 4 Wires                  |
| Dimension    | 100(W) x 210(H) x 29(D)mm         |



## EBC SYSTEM GUARDPHONE

## KGP-W701U


## PRODUCT FUNCTION

- 7" Touch LCD screen
- Video communication with Monitor and Lobbyphone
- Lobbyphone image display and door opening
- GUI interface

## SPECIFICATIONS

|              |                             |
|--------------|-----------------------------|
| Display      | 7 inch Color LCD            |
| Power source | DC 15V±1V / 1.5A            |
| Wiring       | System : 6 Wires            |
| Mount type   | Surface Mount               |
| Dimension    | 205(W) x 128(H) x 18.8(D)mm |

## COMPATIBLE PRODUCTS

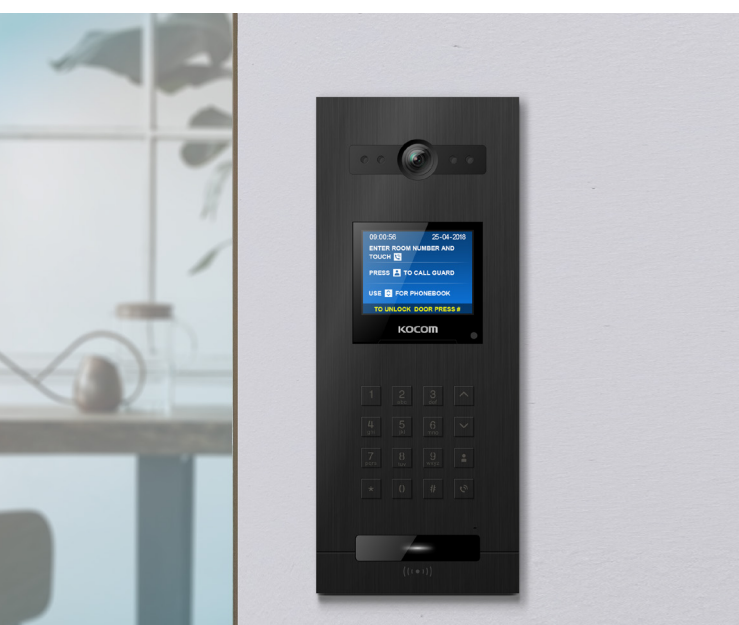

## EBC SYSTEM LOBBYPHONE (1M PIXEL)

## KLP-W350

## PRODUCT FUNCTION

- Access control using touch 16 key
- Video Communication with Monitor and Guardphone
- Doorlock interface and RF card(13.56 MHz) registration/deletion
- Camera and button backlight at night

## SPECIFICATIONS

|              |                                                     |
|--------------|-----------------------------------------------------|
| Display      | 3.5 inch Color LCD                                  |
| Power source | DC 15V (5.5W±20%(On stand by), 7.5W±20%(Full load)) |
| Wiring       | System : 6 Wires                                    |
| Mount type   | Flush mount                                         |
| Camera angle | Horizontal 120°                                     |
| Dimension    | 130(W) x 317.4(H) x 50(D)mm                         |

## COMPATIBLE PRODUCTS



## EBC SYSTEM LOBBYPHONE (1M PIXEL)

KVL-WR06 / KVL-WX08  
KEL-WX012

## PRODUCT FUNCTION

- Lobbyphone with direct buttons for each household
- Up to 20 households
- Doorlock interface and RF card(13.56 MHz) registration/deletion(KVL-WR06)
- Camera and button backlight at night

## SPECIFICATIONS

|              |                           |
|--------------|---------------------------|
| Power source | DC 15V±1V / 1.5A          |
| Wiring       | System : 6 Wires          |
| Mount type   | Flush mount               |
| Camera angle | Horizontal 120°           |
| Dimension    | 134(W) x 353(H) x 45(D)mm |

## COMPATIBLE PRODUCTS







## EBC SYSTEM DOORCAMERA(1M Pixel)

# KC-S81MU

### PRODUCT FUNCTION

- Metal body
- 1 Mega pixels
- White LED for visitor recognition at night
- Call and video communication with monitor
- Doorlock interface

### SPECIFICATIONS

|                   |                                     |
|-------------------|-------------------------------------|
| Power source      | DC 13.5V±0.5V(Powered from monitor) |
| Power consumption | 3.3W(MAX.)                          |
| Wiring            | 4 Wires                             |
| Body material     | Metal A/L                           |
| Mount type        | Surface mount                       |
| Camera angle      | Diagonal 120°                       |
| Resolution        | 1.0 Mega pixel                      |
| Dimension         | 70(W) x 125(H) x 21(D)mm            |



## EBC SYSTEM DOORCAMERA(1M Pixel)

# KC-W81U

### PRODUCT FUNCTION

- Metal body
- 1 Mega pixels
- White LED for visitor recognition at night
- Call and video communication with monitor
- Doorlock interface

### SPECIFICATIONS

|                   |                                      |
|-------------------|--------------------------------------|
| Power source      | DC 13.5V ±0.5V(Powered from monitor) |
| Power consumption | 3.3W(MAX.)                           |
| Wiring            | 4 Wires                              |
| Body material     | Metal A/L                            |
| Mount type        | Surface mount                        |
| Camera angle      | Diagonal 120°                        |
| Resolution        | 1.0 Mega pixel                       |
| Dimension         | 40(W) x 122(H) x 21(D)mm             |



## ACCESSORY AC RELAY UNIT

# HU-DA

### SPECIFICATIONS

|                   |                                 |
|-------------------|---------------------------------|
| Power source      | DC 12V±1V(Powered from monitor) |
| Power consumption | 2.5W(MAX.)                      |
| Wiring            | 4 Wires                         |
| Mount type        | Surface mount                   |
| Dimension         | 35(W) x 21.5(H) x 39(D)mm       |



## 4 WIRE APARTMENT SYSTEM MONITOR

# KCV-X101K

BLACK

WHITE


### PRODUCT FUNCTION


- 10" Color LCD Screen
- Multifamily, Apartment application
- Doorcamera / CCTV monitoring function
- Connection up to 2 Doorcameras and 4 Monitors with Sub-interphone (KIP-32G)
- Overall or individual calling available

### SPECIFICATIONS

|                   |                                                                                                                                                                                                                                                                                                |                |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Model No.         | KCV-X101K (AC)                                                                                                                                                                                                                                                                                 | KCV-X101K (DC) |
| Display           | 10 inch Color LCD                                                                                                                                                                                                                                                                              |                |
| Power source      | AC 100-240V~, 50/60Hz                                                                                                                                                                                                                                                                          | DC 14V-2A      |
| Power consumption | 1.45W(±20%)(On stand by), 10.5W(±20%)(Full load)                                                                                                                                                                                                                                               |                |
| Wiring            | Door camera to last Videophone<br>1) 0.52M Doorcamera : 100m UTP Cat5e<br>CCTV to VDP : 100m ( When using coaxial cable (RG59))<br>Interphone to VDP : 10m<br>※ Refer to "product wiring" below for cable wiring.<br>※ UTP CAT5e : The resistance of 100 m of cable should be 10 ohms or less. |                |
| Mount type        | Surface mount                                                                                                                                                                                                                                                                                  |                |
| Dimension         | 265(W) x 195(H) x 23.5(D)mm                                                                                                                                                                                                                                                                    |                |

### WIRING DIAGRAM

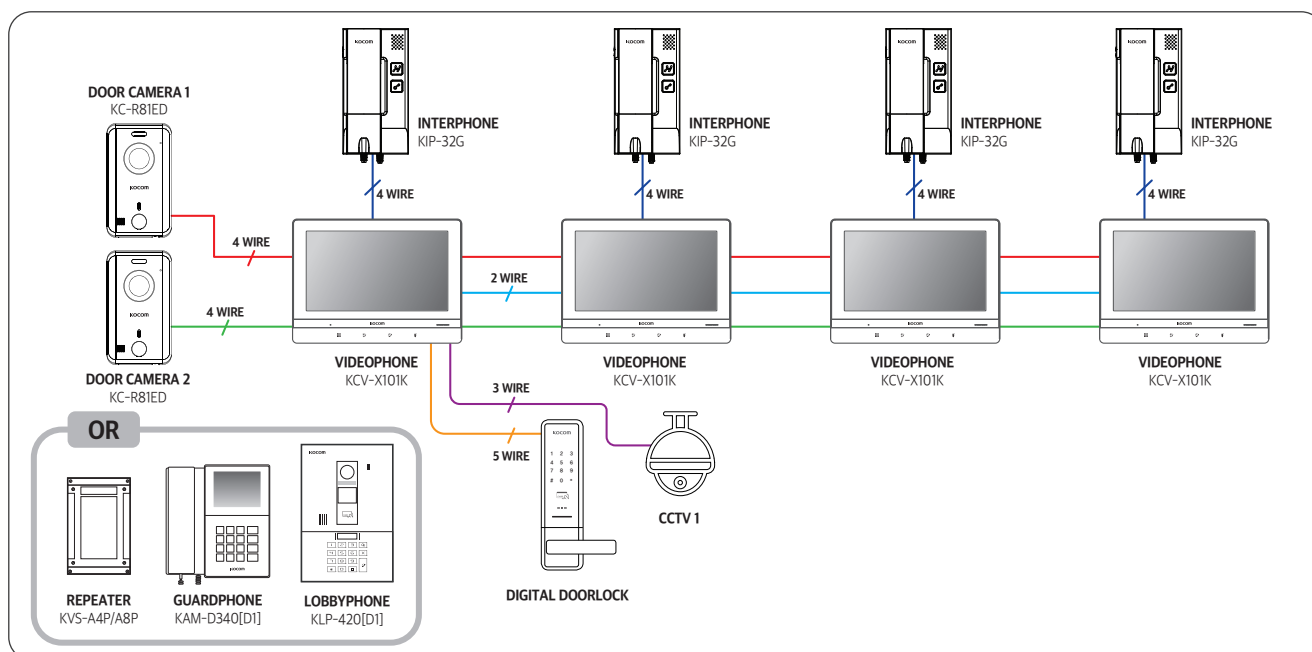

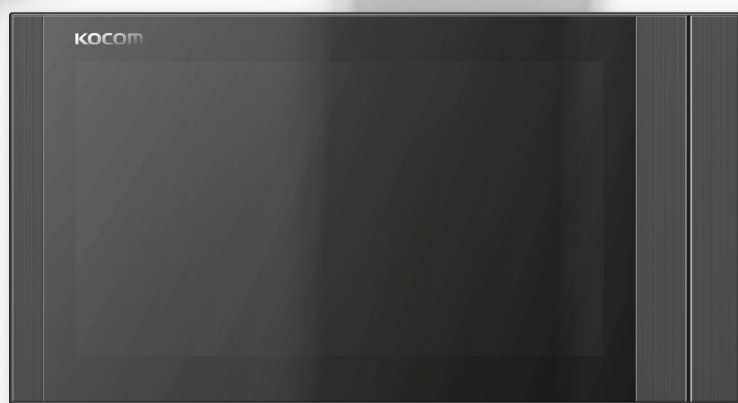

## 4 WIRE APARTMENT SYSTEM MONITOR

# KCV-T701SM




### PRODUCT FUNCTION

- 7" Full touch color LCD monitor
- Slim and modernized design, metal hairline applied
- Maximizing video quality with 2 megapixel camera
- GUI interface
- Auto still image capture (MAX. 32 cuts)
- Video communication with Doorcamera, Guardphone and Lobbyphone
- Connection up to 2 doorcameras and 4 monitors with sub-audio unit (KIP-32G)
- Doorcamera and Lobbyphone monitoring
- Selective Internal call & audio communication with extended units
- Door open (Doorcamera, Lobbyphone)
- Multifamily, Apartment application (KLP-C420 [D1] SYSTEM)
- Compatible with 1080p (FHD) CCTV cameras (TVI, AHD, CVI)

### SPECIFICATIONS

|                   |                                                                                                                |                |
|-------------------|----------------------------------------------------------------------------------------------------------------|----------------|
| Model No.         | KCV-T701SM(AC)                                                                                                 | KCV-T701SM(DC) |
| Display           | 7 inch Color LCD                                                                                               |                |
| Power source      | AC 100~240V, 50/60Hz                                                                                           | DC 14V±1V      |
| Power consumption | 1.7W(On stand by), 14W(Full load)                                                                              |                |
| Wiring            | Doorcamera : 4 Wires (UTP)<br>Ex - Monitor : 4 Wires (UTP) + 2 Wires<br>Interphone: 4 Wires<br>System: 4 Wires |                |
| Mount type        | Surface mount                                                                                                  |                |
| Dimension         | 218(W) x 119(H) x 22(AC)/18(DC) (D)mm                                                                          |                |

### WIRING DIAGRAM

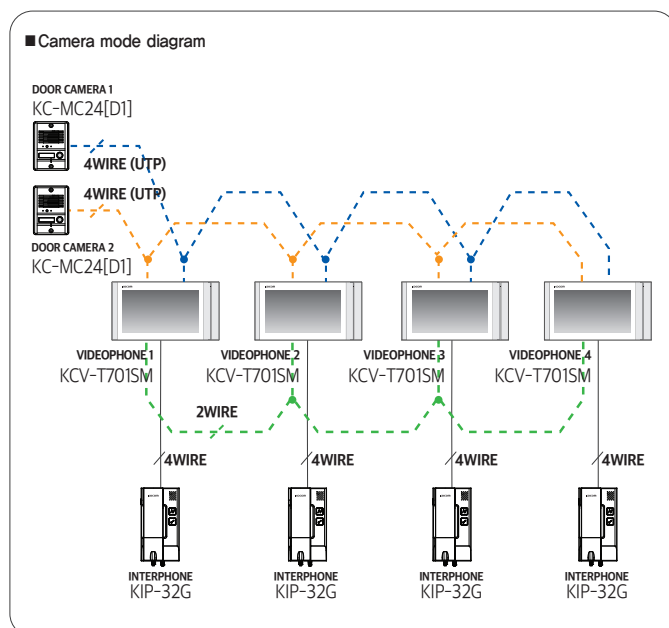

### COMPATIBLE PRODUCTS

#### [DOORCAMERA (D1)]



#### [DOORCAMERA (2MP)]





## 4 WIRE APARTMENT SYSTEM MONITOR

KCV-X701EB **NEW**

SILVER

## PRODUCT FUNCTION


- 7" Color LCD Screen
- Metallic color
- Easy installation and user-friendly operation
- Operating Condition Display with Icons(OSD)
- Touch buttons for control
- Door camera monitoring
- Door open(Door camera)
- Apartment application (KLP-C420R/C420[D1] system)

## SPECIFICATIONS


| Model No.         | KCV-X701EB (AC)                                                 | KCV-X701EB (DC)                                        |
|-------------------|-----------------------------------------------------------------|--------------------------------------------------------|
| Display           | 7inch Color LCD                                                 |                                                        |
| Power source      | AC 100-240V~, 50/60Hz                                           | DC 14V-2A                                              |
| Power consumption | 2.4W(±20%)(On stand by),<br>Max 10W(±20%)(Full load)            | 2.8W(±20%)(On stand by),<br>Max 11.5W(±20%)(Full load) |
| Wiring            | Door Camera : 2mm pitch 4Wire x 1<br>DOOR : 2mm pitch 3Wire x 1 |                                                        |
| Mount type        | Surface mount                                                   |                                                        |
| Dimension         | 220(W) x 123(H) x 22(D)mm                                       |                                                        |

## WIRING DIAGRAM


## ■ CAMERA MODE

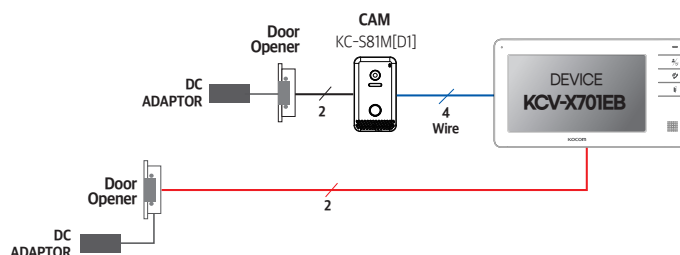

## ■ KVL SYSTEM MODE

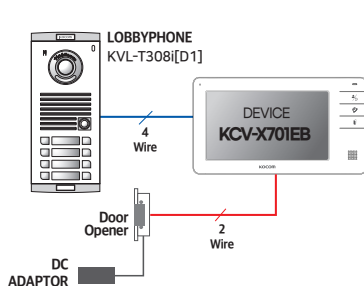

## ■ 420 SYSTEM MODE

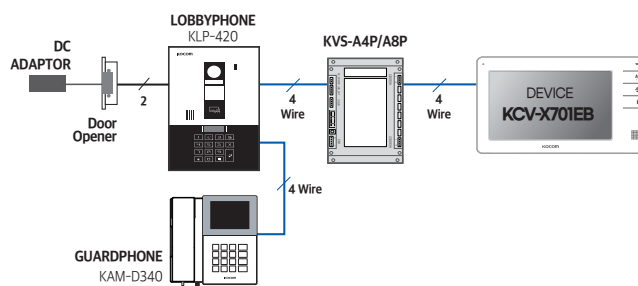





## 4 WIRE APARTMENT SYSTEM MONITOR

# KCV-504 / D504 [D1]

UPGRADE




### PRODUCT FUNCTION

- 7" Color digital LCD monitor
- Video communication with Doorcamera, Guardphone and Lobbyphone
- Doorcamera monitoring
- Operating condition display with icons (OSD)
- Touch buttons for control
- Connection up to 1 Doorcamera 2 Monitors
- Door open (Doorcamera, Lobbyphone)
- Multifamily, Apartment application (KLP-C420 [D1] SYSTEM)


### SPECIFICATIONS

| Model No.         | KCV-504 [D1]                                 | KCV-D504 [D1] |
|-------------------|----------------------------------------------|---------------|
| Display           | 7 inch Color LCD                             |               |
| Power source      | AC 100~240V, 50/60Hz                         | DC 15V-2A     |
| Power consumption | 1.5W(On stand by), 11W(Full load)            |               |
| Wiring            | Doorcamera: 4 Wires<br>Ex - Monitor: 4 Wires |               |
| Mount type        | Surface mount                                |               |
| Dimension         | 223(W) x 130(H) x 26(D)mm                    |               |

### WIRING DIAGRAM

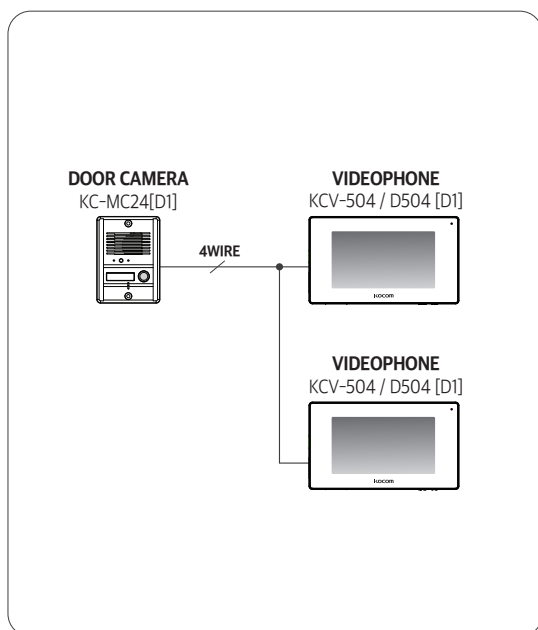

### COMPATIBLE PRODUCTS

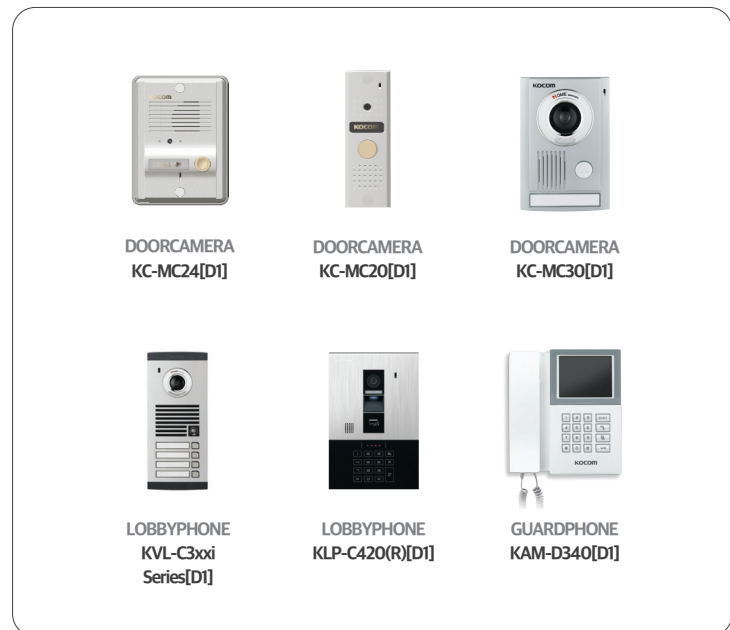



## 4 WIRE APARTMENT SYSTEM MONITOR


# KCV-464 / D464 [D1]

UPGRADE

### PRODUCT FUNCTION

- 4.3" Color LCD monitor
- Video communication with Doorcamera, Guardphone and Lobbyphone
- Doorcamera monitoring
- Operating condition display with icons (OSD)
- Touch buttons for control
- Connection up to 2 doorcameras and 2 monitors with sub-audio unit (KIP-32G).
- Door open (Doorcamera, Lobbyphone)
- Multifamily, Apartment application(KLP-C420 [D1] SYSTEM)
- 2 Video outputs for CCTV camera connection

### WIRING DIAGRAM

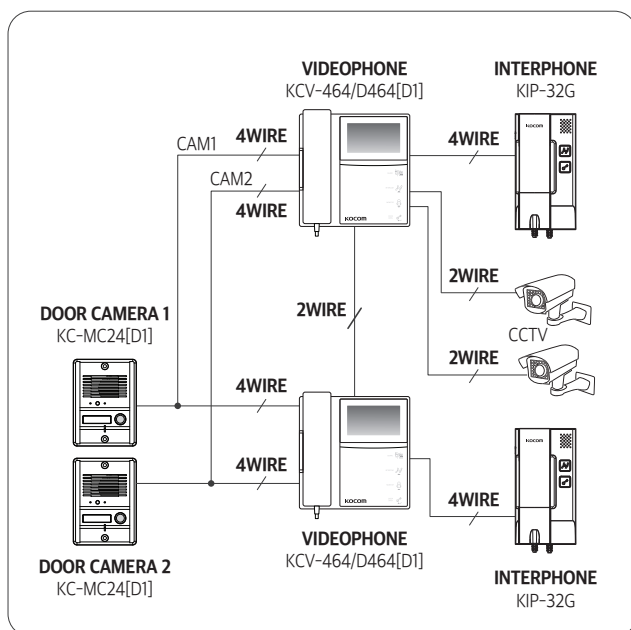

### SPECIFICATIONS

| Model No.         | KCV-464 [D1]                                                           | KCV-D464 [D1] |
|-------------------|------------------------------------------------------------------------|---------------|
| Display           | 4.3 inch Color LCD                                                     |               |
| Power source      | AC 100~240V, 50/60Hz                                                   | DC 13.6V±1V   |
| Power consumption | 1W(On stand by), 8W(Full load)                                         |               |
| Wiring            | Doorcamera : 4 Wires<br>Ex - Monitor : 6 Wires<br>Interphone : 4 Wires |               |
| Mount type        | Surface mount                                                          |               |
| Dimension         | 140(W) x 195(H) x 32(D)mm                                              |               |

### COMPATIBLE PRODUCTS







## 4 WIRE APARTMENT SYSTEM SUB-AUDIOPHONE

# KIP-32G

### PRODUCT FUNCTION

- Audio communication with Doorcamera and Monitor
- Internal communication with indoor units

※ COMPATIBLE PRODUCT : KCV-T701SM, KCV-464 / D464 [D1] / KIP-32G

### SPECIFICATIONS

|              |                          |
|--------------|--------------------------|
| Power source | Powered from monitor     |
| Mount type   | Surface mount            |
| Dimension    | 92(W) x 176(H) x 52(D)mm |


# 4-Wire Apartment System

## DIAGRAM

04

VIDEOPHONE

Up to 100 Houses

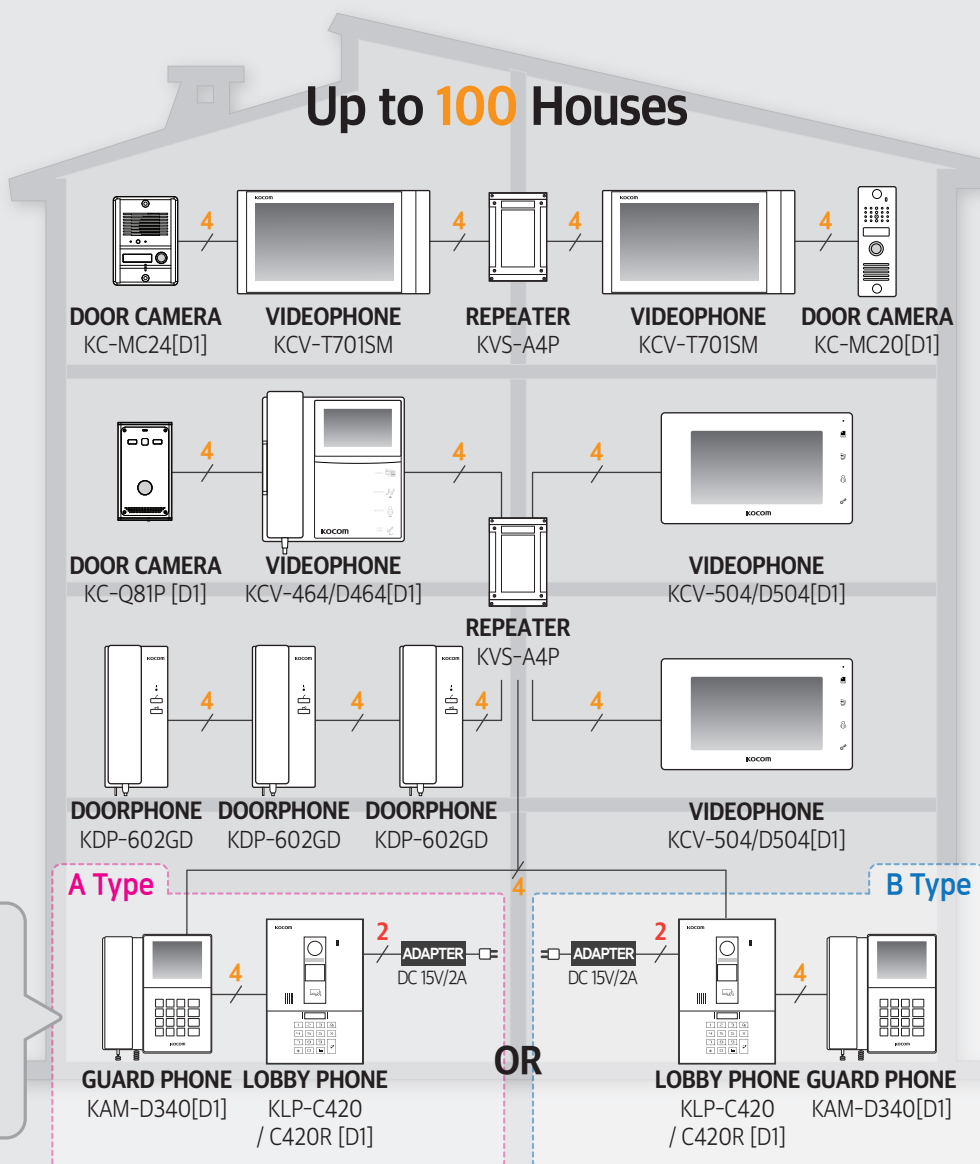

### A type-Between Mode

**'LINK' function to reconfirm a visitor**

: Receive a call from Lobbyphone and hold the line while talking with the resident and link the call to the residential unit

### A type-Between Mode

When a guard station is placed and connected between the Lobbyphone(KLP-C420 / C420R [D1]) and Repeater (KVS-A4P / A8P)

### B type-Direct Mode

When a guard station is connected directly to the Lobbyphone (KLP-C420 / C420R [D1])

\*Upto 4 units of KLP-C420 / C420R[D1] extension is available.





## UPGRADE

### 4 WIRE APARTMENT SYSTEM LOBBYPHONE

## KLP-C420/C420R[D1]

#### PRODUCT FUNCTION

- Access control using touch 15 key
- Video communication with Mointor and Guardphone
- Doorlock interface and RF card(13.56 MHz) registration/deletion (\*KLP-C420R)
- Individual household and common password can be set separately
- Expandable up to 4 units per system
- Camera and button backlight at night
- Camera angle adjustable


#### SPECIFICATIONS

| Model No.         | KLP-C420                       | KLP-C420R(D1)                  |
|-------------------|--------------------------------|--------------------------------|
| Power source      | DC 15V±1V                      |                                |
| Power consumption | 2W(On stand by), 6W(Full load) | 3W(On stand by), 7W(Full load) |
| Wiring            | System: 4 Wires                |                                |
| Mount type        | Flush mount                    |                                |
| Dimension         | 174(W) x 263(H) x 15(D)mm      |                                |

#### COMPATIBLE PRODUCTS



#### ACCESSORY (OPTIONAL)

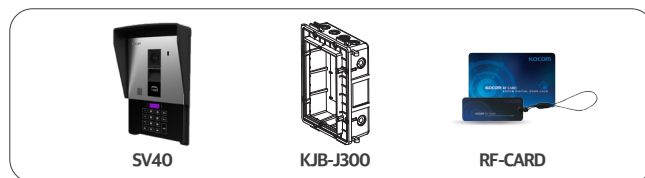

### 4 WIRE APARTMENT SYSTEM DOORPHONE

## KDP-602GD

#### PRODUCT FUNCTION

- Audio communication with Guardphone and Lobbyphone
- Internal communication with indoor units
- Connection up to 3 doorphones
- Door open(Lobbyphone)

#### SPECIFICATIONS

|                   |                                     |
|-------------------|-------------------------------------|
| Power source      | DC 13V±1V (External DC 15V adaptor) |
| Power consumption | 2.5W(Full load)                     |
| Wiring            | 4 Wires                             |
| Mount type        | Surface mount                       |
| Dimesion          | 92(W) x 210(H) x 60.5(D)mm          |

#### COMPATIBLE PRODUCTS



## 4 WIRE APARTMENT SYSTEM GUARDPHONE

**KAM-D340[D1]** **UPGRADE****PRODUCT FUNCTION**

- 4.3" LCD screen
- Audio communication with monitor, Lobbyphone
- Lobbyphone image display and door opening
- Operating condition display(OSD)
- ID / System type / Away mode setting(OSD)
- 'LINK' function to hold and connect call lines

**SPECIFICATIONS**

|                   |                                   |
|-------------------|-----------------------------------|
| Display           | 4.3 inch Color LCD                |
| Power source      | DC 15V±1V                         |
| Power consumption | 1.5W(On stand by), 10W(Full load) |
| Wiring            | 4 Wires                           |
| Mount type        | Surface mount                     |
| Dimension         | 207(W) x 215(H) x 60(D)mm         |

**COMPATIBLE PRODUCTS**

VIDEOPHONE  
KVC-170ISM



VIDEOPHONE  
KCV-504/D504[D1]



VIDEOPHONE  
KCV-464,D464[D1]



INTERPHONE  
KDP-602GD



LOBBYPHONE  
KLP-C420(R)[D1]

## 4 WIRE APARTMENT SYSTEM REPEATER

**KVS-A4P / A8P****PRODUCT FUNCTION**

- KVS-A4P: 4 Port repeater for KLP-C420 / C420R [D1] system
- KVS-A4P: 8 Port repeater for KLP-C420 / C420R [D1] system

**SPECIFICATIONS**

|              |                          |
|--------------|--------------------------|
| Power source | DC 15V±1V                |
| Wiring       | 4 Wires                  |
| Mount type   | Surface mount            |
| Dimension    | 92(W) x 145(H) x 40(D)mm |



## 4 WIRE APARTMENT SYSTEM MULTI ENTRY VIDEO PANEL UPGRADE

# KVL-C302i/C303i/C304i/TC306i/TC308i [D1]

### PRODUCT FUNCTION

- Lobbyphone with direct buttons for each household
- Up to 32 households
- Video communication with monitor
- Doorlock interface and i-Button Key registration/deletion
- White LED for visitor recognition at night
- Camera angle adjustable

### SPECIFICATIONS

|                   |                                    |
|-------------------|------------------------------------|
| Power source      | DC 15V±1V                          |
| Power consumption | 0.5W(On stand by), 4.5W(Full load) |
| Wiring            | System: 4 Wires                    |
| Mount type        | Flush mount                        |
| Dimension         | 125(W) x 290(H) x 48.4(D)mm        |

### MAIN PANEL WITH CAMERA

- KVL-C302i [D1] : Direct 2 push button type
- KVL-C303i [D1] : Direct 3 push button type
- KVL-C304i [D1] : Direct 4 push button type
- KVL-TC306i [D1] : Direct 6 push button type
- KVL-TC308i [D1] : Direct 8 push button type


### EXTENSION PANEL

- KEL-312: Direct 12 push button type
- KEL-T324: Direct 24 push button type

### COMPATIBLE PRODUCTS



### COMPATIBLE PRODUCTS

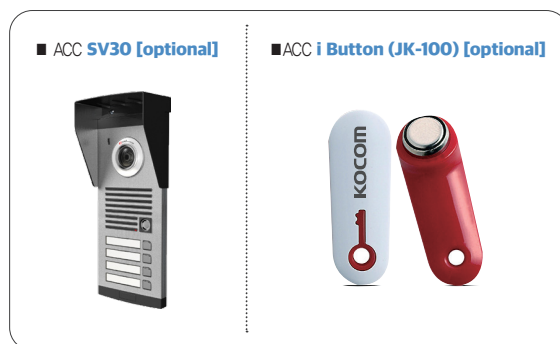

14 Houses



15 Houses



...

32 Houses



## 4 WIRE APARTMENT SYSTEM DOORPHONE KDP-X601Gi


### PRODUCT FUNCTION

- Lobbyphone with direct buttons for each household
- Up to 32 households
- Easy and Simple wiring with 3 wires
- Enhanced call ringtone and Volume (Up to 80dB)
- Connection up to 3 doorphones
- Door open (Outdoor panel)

### SPECIFICATIONS

|                   |                                                |
|-------------------|------------------------------------------------|
| Power source      | AC100~AC240, 50/60Hz                           |
| Power consumption | 1.6W(±20%)(On stand by), 4.5W(±20%)(Full load) |
| Distance          | Lobbyphone <-> Doorphone 100M                  |
| Mount type        | Surface mount                                  |
| Dimension         | 92(W) x 210(H) x 60.5(D)mm                     |

### WIRING DIAGRAM

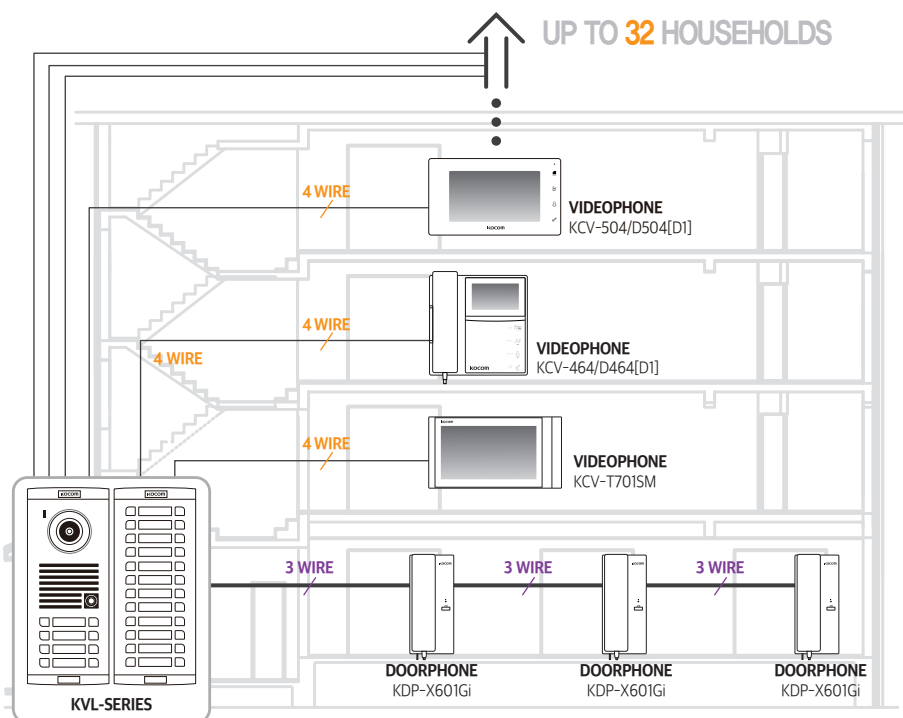





## 4 WIRE APARTMENT SYSTEM DOORCAMERA(2M Pixel)

# KC-MC30M

### PRODUCT FUNCTION

- Metal body
- 2 Mega pixels
- White LED for visitor recognition at night
- Call and video communication with monitor
- Doorlock interface

### SPECIFICATIONS

|                   |                                 |
|-------------------|---------------------------------|
| Power source      | DC 12V±1V(Powered from monitor) |
| Power consumption | 3W(MAX.)                        |
| Wiring            | 4 Wires                         |
| Body material     | Metal A/L                       |
| Mount type        | Surface mount                   |
| Camera angle      | Diagonal 90°(Angle adjustable)  |
| Resolution        | 2 Mega pixel                    |
| Dimension         | 110(W) x 158(H) x 39(D)mm       |



## 4 WIRE APARTMENT SYSTEM DOORCAMERA(2M Pixel)

# KC-S81M2

### PRODUCT FUNCTION

- Metal body
- 2 Mega pixels
- White LED for visitor recognition at night
- Call and video communication with monitor
- Doorlock interface

### SPECIFICATIONS

|                   |                                 |
|-------------------|---------------------------------|
| Power source      | DC 12V±1V(Powered from monitor) |
| Power consumption | 3W(MAX.)                        |
| Wiring            | 4 Wires                         |
| Body material     | Metal A/L                       |
| Mount type        | Surface mount                   |
| Camera angle      | Diagonal 90°                    |
| Resolution        | 2 Mega pixel                    |
| Dimension         | 70(W) x 125(H) x 21(D)mm        |



## 4 WIRE APARTMENT SYSTEM DOORCAMERA(2M Pixel)

# KC-MC24M

### PRODUCT FUNCTION

- Metal body
- 2 Mega pixels
- White LED for visitor recognition at night
- Call and video communication with monitor
- Doorlock interface

### SPECIFICATIONS

|                   |                                 |
|-------------------|---------------------------------|
| Power source      | DC 12V±1V(Powered from monitor) |
| Power consumption | 3W(MAX.)                        |
| Wiring            | 4 Wires                         |
| Body material     | Metal A/L                       |
| Mount type        | Surface mount                   |
| Camera angle      | Diagonal 90°                    |
| Resolution        | 2 Mega pixel                    |
| Dimension         | 96(W) x 127(H) x 32(D)mm        |



## 4 WIRE APARTMENT SYSTEM DOORCAMERA(2M Pixel)

# KC-MC20M

### PRODUCT FUNCTION

- Metal body
- 2 Mega pixels
- White LED for visitor recognition at night
- Call and video communication with monitor
- Doorlock interface

### SPECIFICATIONS

|                   |                                 |
|-------------------|---------------------------------|
| Power source      | DC 12V±1V(Powered from monitor) |
| Power consumption | 3W(MAX.)                        |
| Wiring            | 4 Wires                         |
| Body material     | Metal A/L                       |
| Mount type        | Surface mount                   |
| Camera angle      | Diagonal 90°                    |
| Resolution        | 2 Mega pixel                    |
| Dimension         | 40(W) x 120(H) x 22(D)mm        |



## 4 WIRE APARTMENT SYSTEM DOORCAMERA

### KC-R80ED/E81ED

#### PRODUCT FUNCTION

- Wide angle color camera
- White LED for night vision
- Video and interphone to the indoor monitor
- Doorlock release
- Dummy (Option)

#### SPECIFICATIONS

| Model No.         | KC-R80ED                         | KC-R81ED                 |
|-------------------|----------------------------------|--------------------------|
| Power source      | DC 12V±1V (Powered from monitor) |                          |
| Power consumption | 3W(MAX.)                         |                          |
| Wiring            | 4 Wires                          |                          |
| Mount type        | Flush mount                      | Surface mount            |
| Camera angle      | Diagonal 90° ± 3°                |                          |
| Resolution        | 0.52 Mega pixel                  |                          |
| Dimension         | 87(W) x 150(H) x 15(D)mm         | 87(W) x 150(H) x 34(D)mm |



## 4 WIRE APARTMENT SYSTEM DOORCAMERA

### KC-MC24[D1]

#### PRODUCT FUNCTION

- Metal body
- High quality video
- White LED for visitor recognition at night
- Call and video communication with monitor
- Doorlock interface

#### SPECIFICATIONS

|                   |                                 |
|-------------------|---------------------------------|
| Power source      | DC 12V±1V(Powered from monitor) |
| Power consumption | 3W(MAX.)                        |
| Wiring            | 4 Wires                         |
| Body material     | Metal A/L                       |
| Mount type        | Surface Mount                   |
| Camera angle      | Diagonal 90°                    |
| Resolution        | 0.41 Mega pixel                 |
| Dimension         | 96(W) x 127(H) x 32(D)mm        |



## 4 WIRE APARTMENT SYSTEM DOORCAMERA

### KC-S81M[D1]

#### PRODUCT FUNCTION

- Metal body
- High quality video
- White LED for visitor recognition at night
- Call and video communication with monitor
- Doorlock interface

#### SPECIFICATIONS

|                   |                                 |
|-------------------|---------------------------------|
| Power source      | DC 12V±1V(Powered from monitor) |
| Power consumption | 3W(MAX.)                        |
| Wiring            | 4 Wires                         |
| Body material     | Metal A/L                       |
| Mount type        | Surface Mount                   |
| Camera angle      | Diagonal 90°                    |
| Resolution        | 0.41 Mega pixel                 |
| Dimension         | 70(W) x 125(H) x 21(D)mm        |



## 4 WIRE APARTMENT SYSTEM DOORCAMERA


### KC-MC20[D1]

#### PRODUCT FUNCTION

- Metal body
- 2 Mega pixels
- White LED for visitor recognition at night
- Call and video communication with monitor
- Doorlock interface

#### SPECIFICATIONS

|                   |                                 |
|-------------------|---------------------------------|
| Power source      | DC 12V±1V(Powered from monitor) |
| Power consumption | 3W(MAX.)                        |
| Wiring            | 4 Wires                         |
| Body material     | Metal A/L                       |
| Mount type        | Surface Mount                   |
| Camera angle      | Diagonal 90°                    |
| Resolution        | 0.41 Mega pixel                 |
| Dimension         | 40(W) x 120(H) x 22(D)mm        |

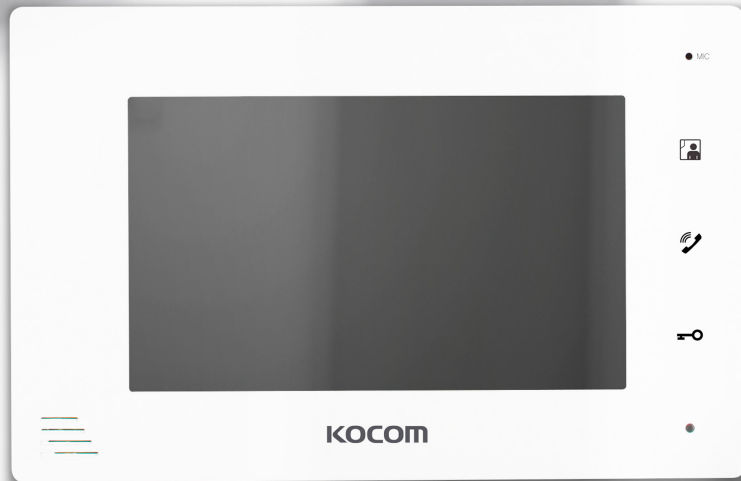

## 2 WIRE NON-POLARITY VIDEOPHONE MONITOR

# KCV-D372[D1] UPGRADE




### PRODUCT FUNCTION

- Easy and simple wiring with 2 wires
- 7" Color digital LCD monitor
- Video communication with Doorcamera
- Doorcamera monitoring
- Operating condition display with icons (OSD)
- Touch buttons for control
- Connection up to 1 doorcameras and 2 monitors
- Door open (Doorcamera)

### SPECIFICATIONS

|                   |                                   |
|-------------------|-----------------------------------|
| Display           | 7 inch Color LCD                  |
| Power source      | DC 12V±1V                         |
| Power consumption | 0.9W(On stand by), 13W(Full load) |
| Wiring            | 2 Wires                           |
| Mount type        | Surface mount                     |
| Dimension         | 222(W) x 144(H) x 26(D)mm         |

### WIRING DIAGRAM

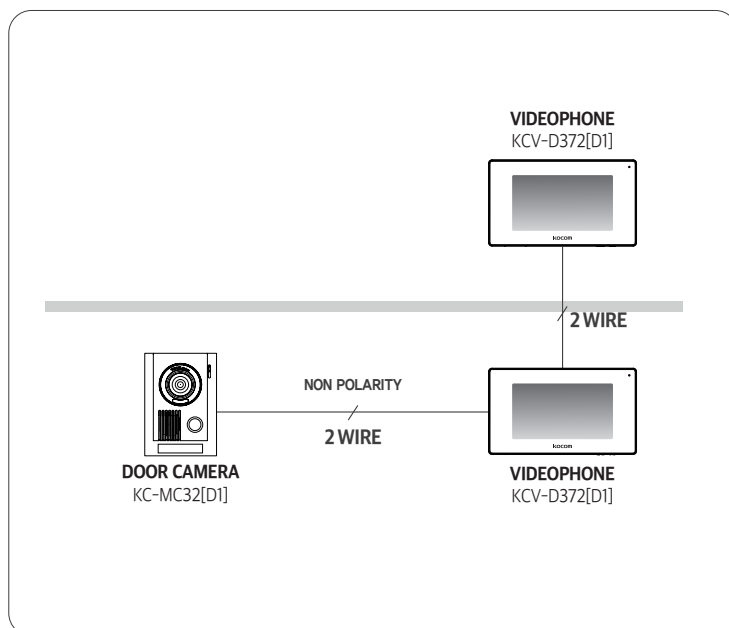

### COMPATIBLE PRODUCTS





## 2 WIRE APARTMENT SYSTEM DOORCAMERA KC-MC32[D1]

### PRODUCT FUNCTION

- Metal body
- White LED for visitor recognition at night
- Call and video communication with monitor
- Doorlock interface

### SPECIFICATIONS

|                   |                                 |
|-------------------|---------------------------------|
| Power source      | DC 15V±2V(Powered from monitor) |
| Power consumption | 3W(MAX.)                        |
| Wiring            | 2 Wires                         |
| Body material     | Metal A/L                       |
| Mount type        | Surface mount                   |
| Camera angle      | Diagonal 90°                    |
| Resolution        | 0.41 Mega pixel                 |
| Dimension         | 110(W) x 158(H) x 39(D)mm       |



## 2 WIRE APARTMENT SYSTEM DOORCAMERA KC-MC11[D1]

### PRODUCT FUNCTION

- Metal body
- White LED for visitor recognition at night
- Call and video communication with monitor
- Doorlock interface

### SPECIFICATIONS

|                   |                                  |
|-------------------|----------------------------------|
| Power source      | DC 15V ±2V(Powered from monitor) |
| Power consumption | 3W(MAX.)                         |
| Wiring            | 2 Wires                          |
| Body material     | Metal A/L                        |
| Mount type        | Surface mount                    |
| Camera angle      | Diagonal 90°                     |
| Resolution        | 0.41 Mega pixel                  |
| Dimension         | 40(W) x 120(H) x 22(D)mm         |



# 05.

## INTERPHONE DOORPHONE

KOCOM interphone and doorphone have been exported to all over the world as well as a domestic market because of its merits of easy installation and convenient use.

KOCOM has developed and manufactured the Interphone and Doorphone with voice quality of high. Reliability for communication based on automated high-tech manufacturing facilities and supplied overseas and domestic. KOCOM has various functional product groups for customized installation place such as a house, a commercial building, An office and etc., and it is easy and convenient for a customer to install and operate them.



KDP-Q81F ▲



KD-Q81T ▲

## INTERPHONE DOORPHONE

## KDP-Q81F / KD-Q81T

## PRODUCT FUNCTION

- Handsfree type doorphone
- Call and audio communication with each other
- Connection up to 120 households, 7 extension connections available
- Internal communication with indoor units
- Door open (Outdoor panel)


## SPECIFICATIONS [KDP-Q81F]


|                   |                                  |
|-------------------|----------------------------------|
| Power source      | AC 100~240V, 50/60Hz             |
| Power consumption | 1.3W(On stand by), 4W(Full load) |
| Wiring            | 3 Wires                          |
| Mount type        | Surface mount                    |
| Dimension         | 119(W) x 170(H) x 30(D)mm        |

## SPECIFICATIONS [KD-Q81T]

|                   |                                    |
|-------------------|------------------------------------|
| Power source      | DC 12V±2V (Powered from doorphone) |
| Power consumption | 2W(MAX.)                           |
| Wiring            | 3 Wires                            |
| Mount type        | Surface mount                      |
| Dimension         | 94(W) x 134(H) x 21.5(D)mm         |

## WIRING DIAGRAM

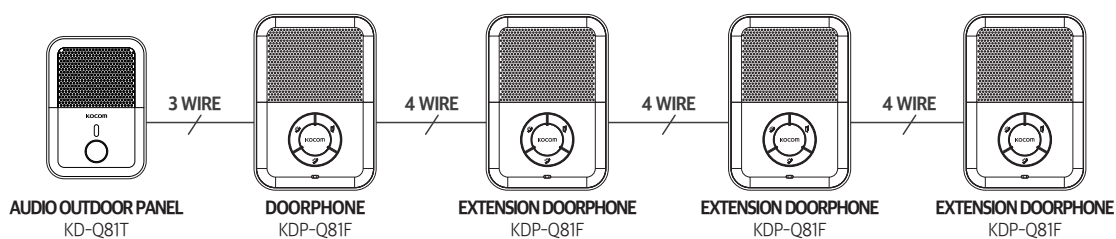

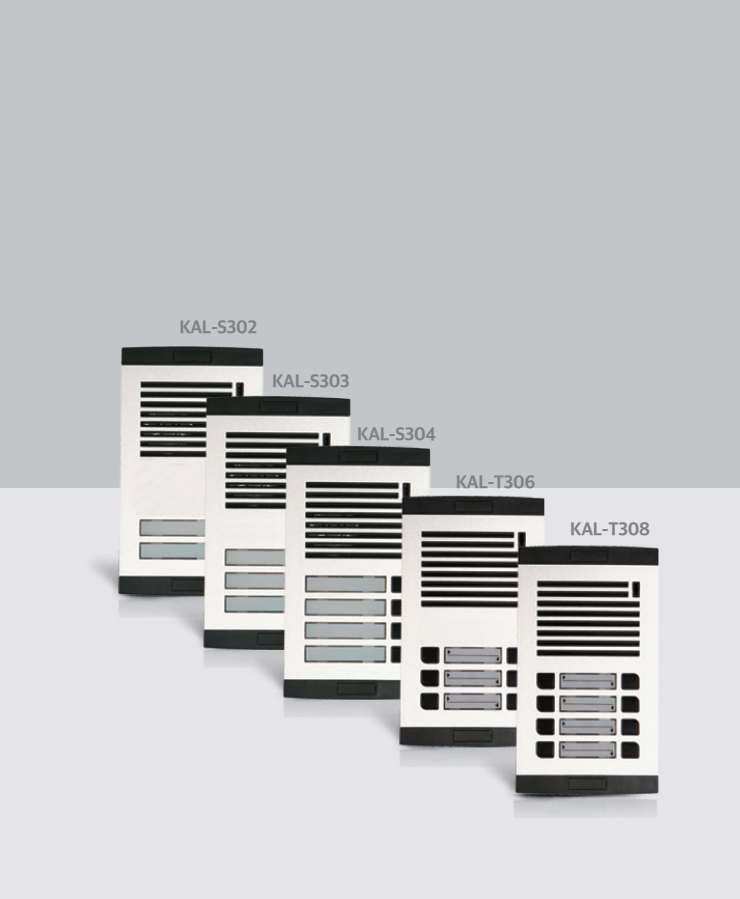

## MULTI ENTRY AUDIO PANEL 3+n WIRE AUDIO SYSTEM FOR VILLA

### KAL-S302/S303/S304/ T306/T308

### KEL-A308/AT316 (Extension Unit)


#### PRODUCT FUNCTION

- Slim design surface mount type audio entrance panel with buttons
- Easy wiring with 3 wires in common plus 1 wire for ID
- Call and audio communication with interphone(KIP-304)
- Connection up to 120 households, expandable up to 7 extension units
- Up to 2 interphones(KIP-304) per 1 household
- Door open (Common gate)
- Name plate with LED backlight
- Security alarm sensor connection (Optional)

#### SPECIFICATIONS

|                   |                                              |
|-------------------|----------------------------------------------|
| Power source      | DC 12V±1V (With adapter)                     |
| Power consumption | 1.2W(On stand by), MAX 4W (±20%) (Full load) |
| Wiring            | 3 + N Wires                                  |
| Mount type        | Surface mount                                |
| Dimension         | 125(W) x 240(H) x 30(D)mm                    |

#### SYSTEM CONFIGURATION (UP TO 120 HOUSES)

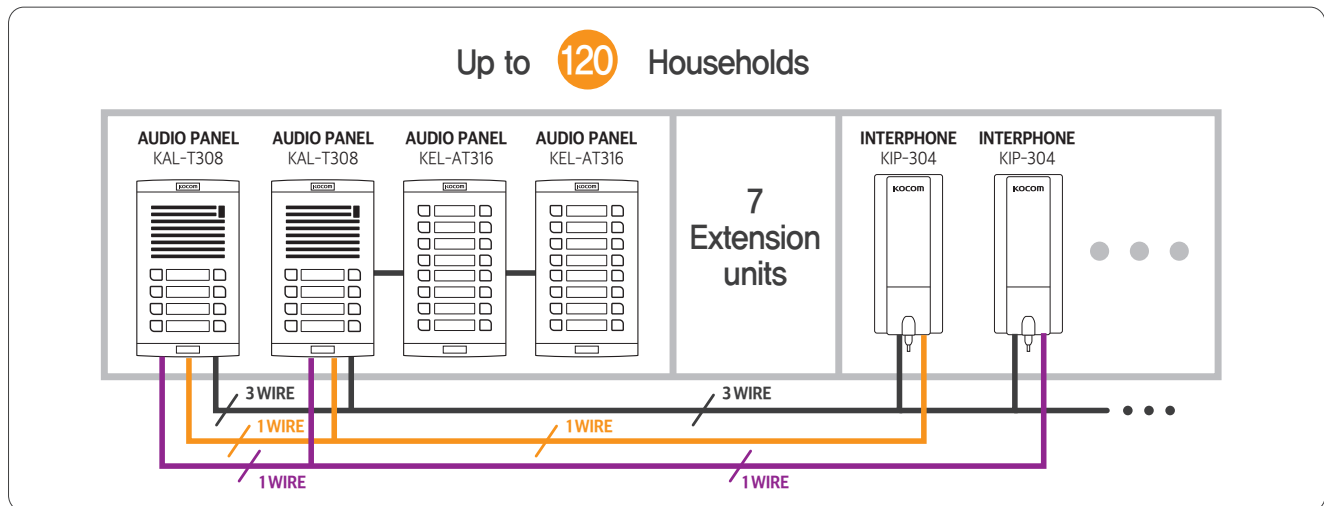

## AUDIO INTERPHONE KIP-304

#### PRODUCT FUNCTION

- Audio communication with Guardphone and Lobbyphone
- Internal communication with indoor units
- Connection up to 3 doorphones
- Door Open (Outdoor panel)

#### SPECIFICATIONS

|                   |                                |
|-------------------|--------------------------------|
| Power source      | DC 12V±1V (Powered from panel) |
| Power consumption | 5W(MAX.)                       |
| Wiring            | 3 + N Wires                    |
| Mount type        | Surface mount                  |
| Dimension         | 75(W) x 175(H) x 49.5(D)mm     |



## INTERPHONE DOORPHONE KDP-601A/KDP-601D

### PRODUCT FUNCTION

- Easy and simple wiring with 2 wires
- Audio communication with outdoor panel
- Connection up to 3 doorphones
- Door Open (Outdoor panel)

### SPECIFICATIONS

| Model No.         | KDP-601A                              | KDP-601D                              |
|-------------------|---------------------------------------|---------------------------------------|
| Power source      | AC 100~240V, 50/60Hz                  | DC 6V                                 |
| Power consumption | 0.5W(On stand by),<br>3.3W(Full load) | 0.9W(On stand by),<br>4.5W(Full load) |
| Wiring            | 2 Wires                               |                                       |
| Mount type        | Surface mount                         |                                       |
| Dimension         | 92(W) x 210(H) x 60.5(D)mm            |                                       |

DC 6V



## INTERPHONE DOORPHONE KDP-602A/KDP-602D

### PRODUCT FUNCTION


- Audio communication with outdoor panel
- Internal communication with indoor units
- Door open (Outdoor panel)

### SPECIFICATIONS


| Model No.         | KDP-602A                                    | KDP-602D                  |
|-------------------|---------------------------------------------|---------------------------|
| Power source      | AC 110V, AC 220V, AC 127/220,<br>50Hz, 60Hz | Powered from<br>main unit |
| Power consumption | 1.3W(On stand by), 4W(Full load)            | 4W(MAX.)                  |
| Wiring            | 6 Wires                                     |                           |
| Mount type        | Surface mount                               |                           |
| Dimension         | 92(W) x 210(H) x 60.5(D)mm                  |                           |

### WIRING DIAGRAM

#### ■ KDP-601A

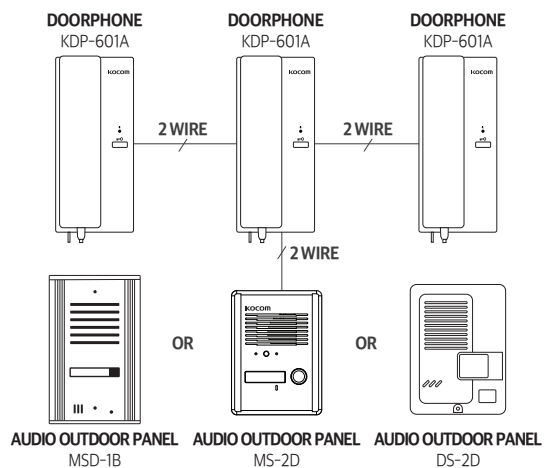

#### ■ KDP-602A/D

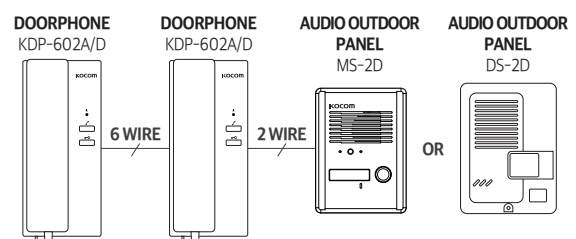





## DOORPHONE AUDIO OUTDOOR PANEL DS-2D

### PRODUCT FUNCTION

- Plastic outdoor panel
- Call and audio communication with doorphone
- Doorlock interface

### SPECIFICATIONS

|                   |                                        |
|-------------------|----------------------------------------|
| Power source      | DC 6V ~ DC 9V (Powered from doorphone) |
| Power consumption | 1.5W(MAX.)                             |
| Wiring            | 2 Wires                                |
| Mount type        | Surface mount                          |
| Dimension         | 99(W) x 131(H) x 30(D)mm               |

### COMPATIBLE PRODUCTS



## DOORPHONE AUDIO OUTDOOR PANEL MS-2D


### PRODUCT FUNCTION

- Metal outdoor panel
- Call and audio communication with doorphone
- Doorlock interface

### SPECIFICATIONS

|                   |                                        |
|-------------------|----------------------------------------|
| Power source      | DC 6V ~ DC 9V (Powered from doorphone) |
| Power consumption | 1.5W(MAX.)                             |
| Wiring            | 2 Wires                                |
| Mount type        | Surface mount                          |
| Dimension         | 95(W) x 127(H) x 32(D)mm               |

### COMPATIBLE PRODUCTS

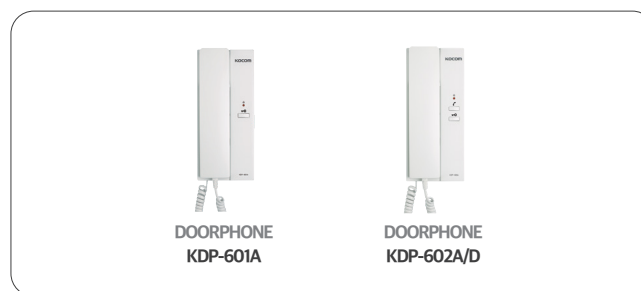



## 4 WIRE VIDEO VILLA SYSTEM AUDIO OUTDOOR PANEL

# MSD-1B / MSD-2B / MSD-3B / MSD-4B


### PRODUCT FUNCTION

- Aluminum audio entrance panel with buttons
- Easy wiring with 2 wires
- Call and audio communication with doorphone
- Door Open (Outdoor panel)

### SPECIFICATIONS

|              |                           |
|--------------|---------------------------|
| Power source | Powered from doorphone    |
| Wiring       | 2 Wires                   |
| Mount type   | Surface mount             |
| Dimension    | 122(W) x 199(H) x 35(D)mm |

### WIRING DIAGRAM

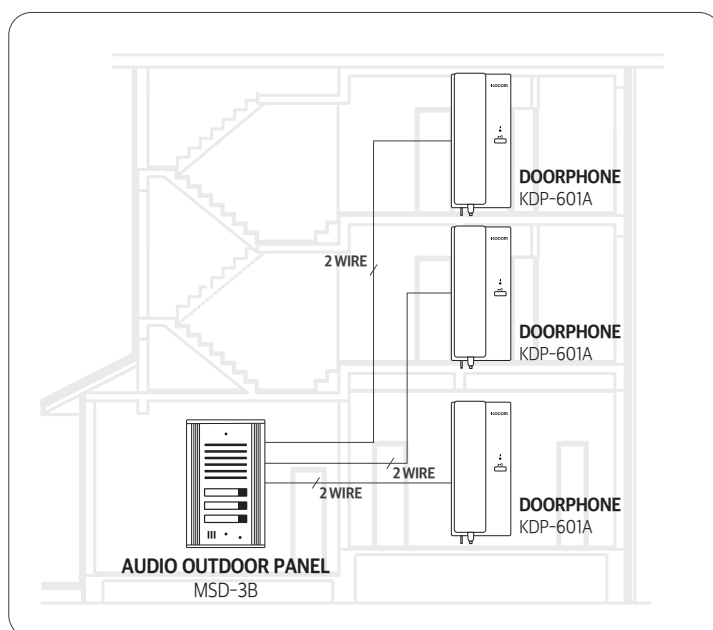

### COMPATIBLE PRODUCTS





## INTERPHONE DUPLEX INTERPHONE KIP-601P


### PRODUCT FUNCTION

- Duplex interphone
- Main(KIP-601PM) and Sub(KIP-601PS) kit
- Easy and simple wiring with 2 wires
- Audio communication with each other

### SPECIFICATIONS

| Model No.         | KIP-601PM                        | KIP-601PS              |
|-------------------|----------------------------------|------------------------|
| Power source      | DC 6V±1V                         | Powered from Main unit |
| Power consumption | 0.2W(On stand by), 1W(Full load) |                        |
| Wiring            | 2 Wires                          |                        |
| Mount type        | Surface mount                    |                        |
| Dimension         | 92(W) x 210(H) x 60.5(D)mm       |                        |

### WIRING DIAGRAM

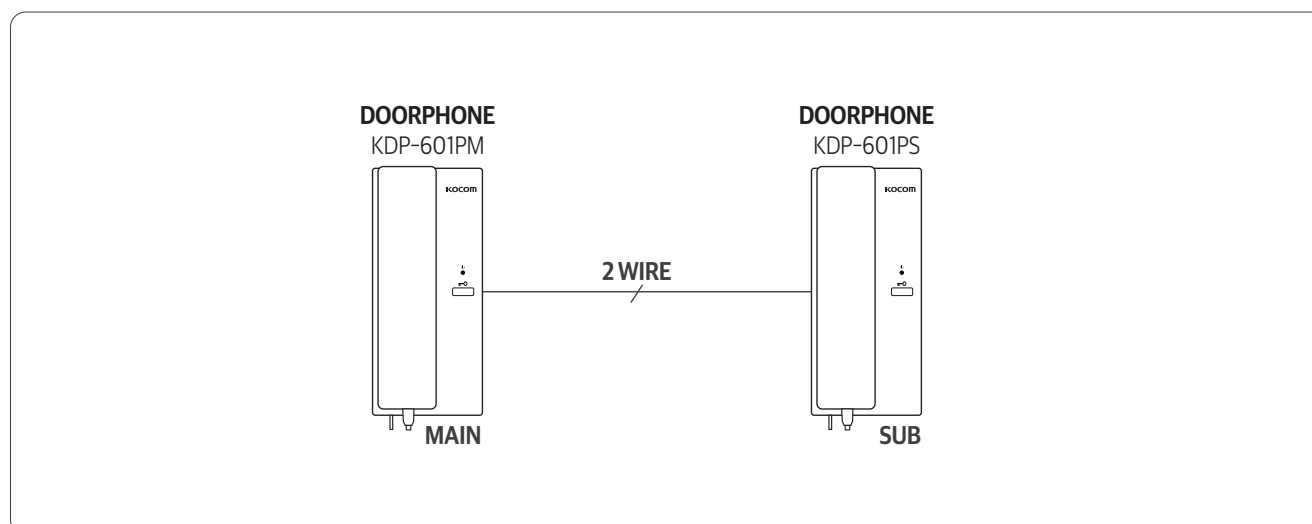

## INTERPHONE DUPLEX INTERPHONE IP-201P

### PRODUCT FUNCTION

- Duplex interphone
- Main(IP-201PM) and Sub(IP-201PS) kit
- Easy and simple wiring with 2 wires
- Audio communication with each other

### SPECIFICATIONS

| Model No.         | IP-201PM                                 | IP-201PS               |
|-------------------|------------------------------------------|------------------------|
| Power source      | AC 110V, AC 220V, AC 127/220, 50Hz, 60Hz | Powered from main unit |
| Power consumption | 0.9W(On stand by), 5W(Full load)         |                        |
| Wiring            | 2 Wires                                  |                        |
| Mount type        | Surface mount                            |                        |
| Dimension         | 108(W) x 218(H) x 80(D)mm                |                        |



## INTERPHONE MULTIPLE INTERPHONE

**KIP-605PG****PRODUCT FUNCTION**

- 5CH multiple interphone
- Audio communication with extened interphones and Lobbyphone

**SPECIFICATIONS**

|                   |                                     |
|-------------------|-------------------------------------|
| Power source      | DC 24V±2V                           |
| Power consumption | 0.85W(On stand by), 1.7W(Full load) |
| Wiring            | 4 Wires                             |
| Mount type        | Surface mount                       |
| Dimension         | 92(W) x 210(H) x 63.5(D)mm          |



## INTERPHONE MULTIPLE INTERPHONE

**KIP-611PG****PRODUCT FUNCTION**

- 11CH multiple interphone
- Audio communication with extened interphones and Lobbyphone

**SPECIFICATIONS**

|                   |                                     |
|-------------------|-------------------------------------|
| Power source      | DC 24V±2V                           |
| Power consumption | 0.85W(On stand by), 1.7W(Full load) |
| Wiring            | 4 Wires                             |
| Mount type        | Surface mount                       |
| Dimension         | 92(W) x 210(H) x 63.5(D)mm          |



## INTERPHONE DOOR PANEL

**DS-4M****PRODUCT FUNCTION**


- Plastic outdoor panel
- Call and audio communication with Interphone

**SPECIFICATIONS**


|                   |                            |
|-------------------|----------------------------|
| Power source      | Powered from interphone    |
| Power consumption | 1W(MAX.)                   |
| Wiring            | 4 Wires                    |
| Mount type        | Surface mount              |
| Dimension         | 99(W) x 130(H) x 28.5(D)mm |



WIRING DIAGRAM [ KIP-605PG ]

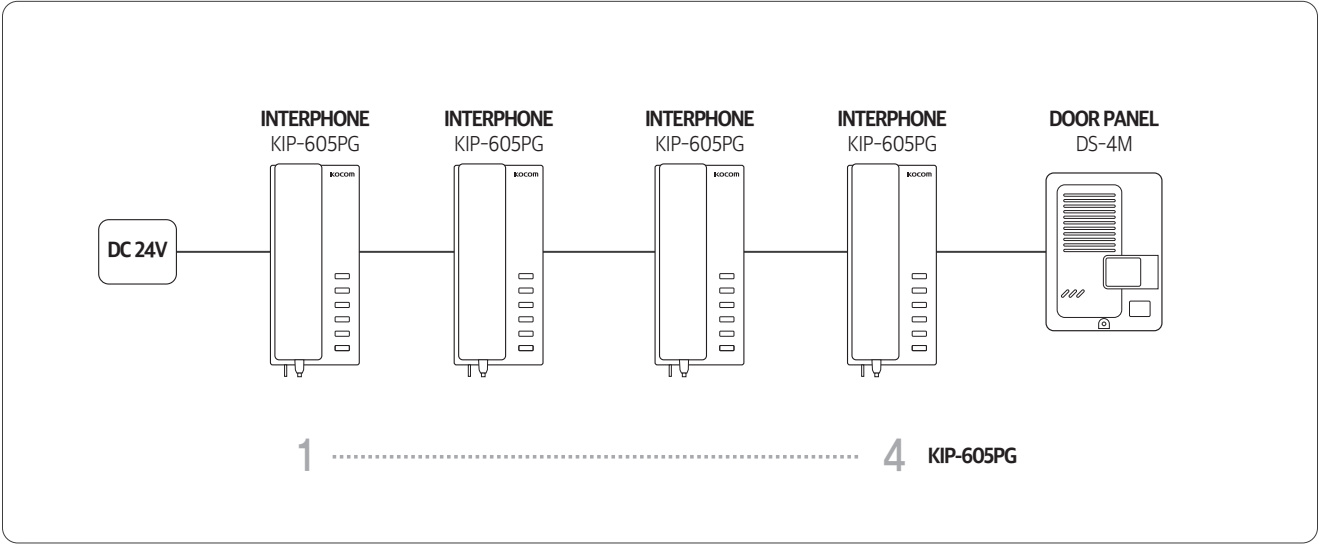

WIRING DIAGRAM [ KIP-611PG ]

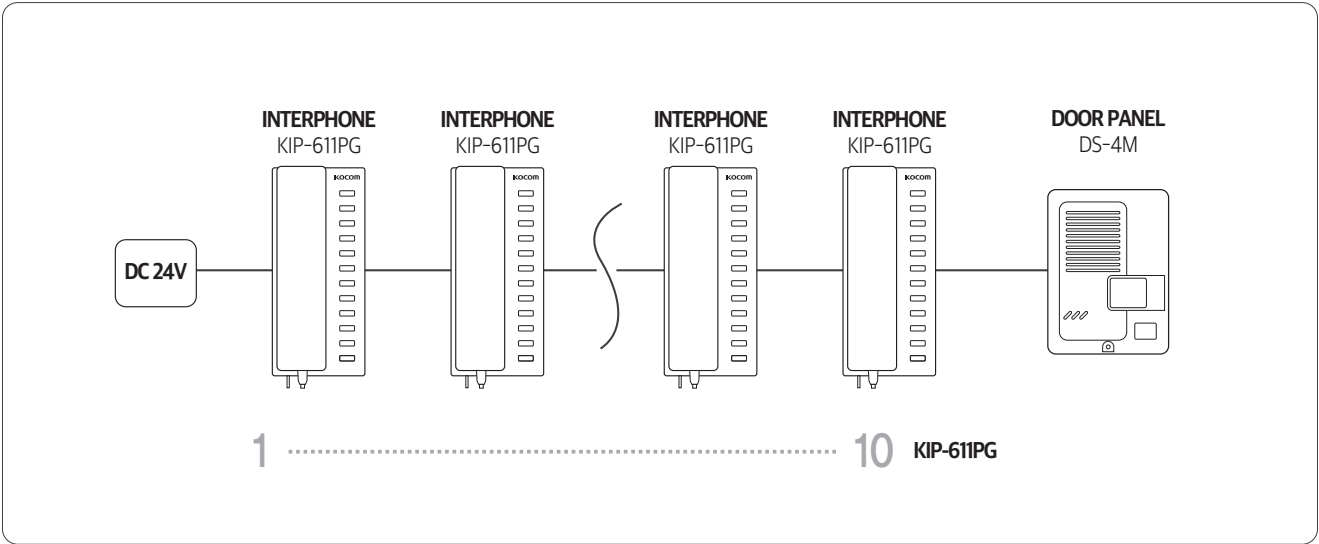



## INTERPHONE MULTIPLE INTERPHONE KIP-612ML

### PRODUCT FUNCTION

- 12CH Multiple Interphone
- Master(KIP-612ML) and Slave(KIP-300/DS-2C) system
- Audio communication with Slave unit
- LED indication for channel in use

### SPECIFICATIONS

|                   |                                     |
|-------------------|-------------------------------------|
| Power source      | DC 24V±2V                           |
| Power consumption | 0.85W(On stand by), 1.7W(Full load) |
| Wiring            | 2 Wires                             |
| Mount type        | Surface mount                       |
| Dimension         | 92(W) x 210(H) x 63.5(D)mm          |



## INTERPHONE MULTIPLE INTERPHONE KIP-620ML

### PRODUCT FUNCTION

- 20CH Multiple interphone
- Master(KIP-620ML) and Slave(KIP-300/DS-2C) system
- Audio communication with slave unit
- LED indication for channel in use

### SPECIFICATIONS

|                   |                                 |
|-------------------|---------------------------------|
| Power source      | DC 24V±2V                       |
| Power consumption | 1W(On stand by), 10W(Full load) |
| Wiring            | Using terminal box              |
| Mount type        | Desktop                         |
| Dimension         | 175(W) x 175(H) x 55(D)mm       |



## INTERPHONE SLAVE INTERPHONE

### KIP-300

#### PRODUCT FUNCTION

- Slave unit for KIP-612ML/620ML
- Audio communication with master unit

#### SPECIFICATIONS

|                   |                            |
|-------------------|----------------------------|
| Power source      | Powered from master unit   |
| Power consumption | 2W (MAX.)                  |
| Wiring            | 2 Wires                    |
| Mount type        | Surface mount              |
| Dimension         | 75(W) x 175(H) x 49.5(D)mm |



## INTERPHONE SLAVE OUTDOOR PANEL AUDIO

### DS-2C


#### PRODUCT FUNCTION

- Slave unit for KIP-612ML/620ML
- Audio communication with Master unit

#### SPECIFICATIONS

|                   |                          |
|-------------------|--------------------------|
| Power source      | Powered from master unit |
| Power consumption | 2W (MAX.)                |
| Wiring            | 2 Wires                  |
| Mount type        | Surface mount            |
| Dimension         | 99(W) x 130(H) x 30(D)mm |

#### WIRING DIAGRAM FOR KIP-620ML

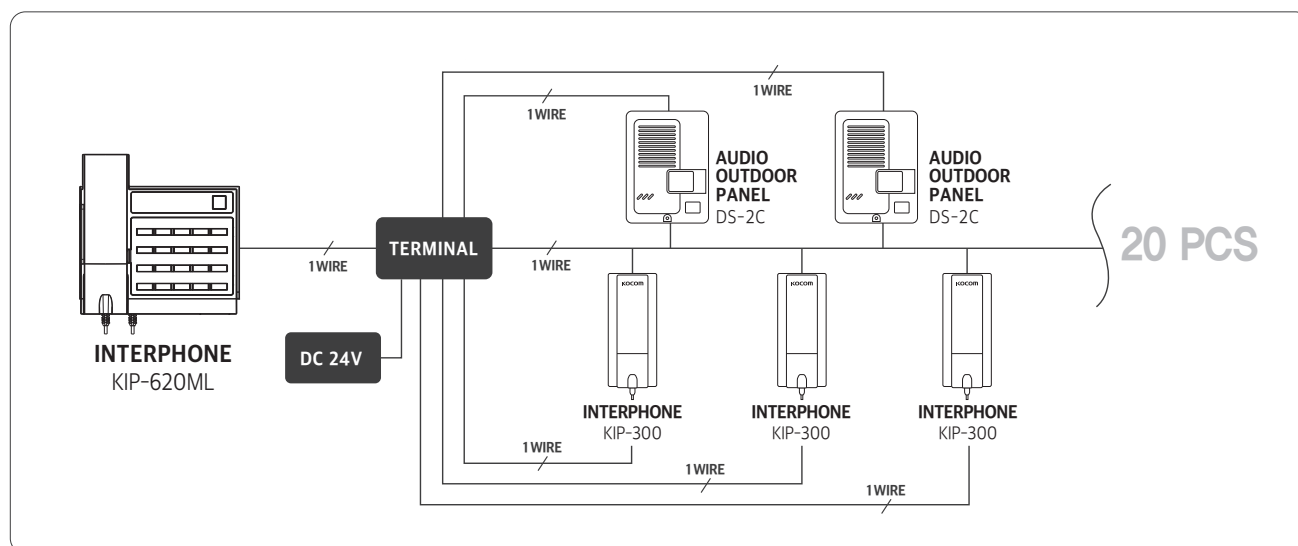



## INTERPHONE INTERCOM

# KIC-301/304/308(1CH·4CH·8CH)/300S(Slave)


## PRODUCT FUNCTION

- Master(KIC-301/304/308) and Slave(KIC-300S) system
- Audio communication with slave unit
- LED indication for channel in use

## SPECIFICATIONS

|              |                           |                          |
|--------------|---------------------------|--------------------------|
| Model No.    | KIC-301/304/308           | KIC-300S                 |
| Power source | DC 6V±TV                  | Powered from master unit |
| Wiring       | 2 Wires                   |                          |
| Mount type   | Desktop                   |                          |
| Dimension    | 119(W) x 170(H) x 30(D)mm |                          |

## WIRING DIAGRAM

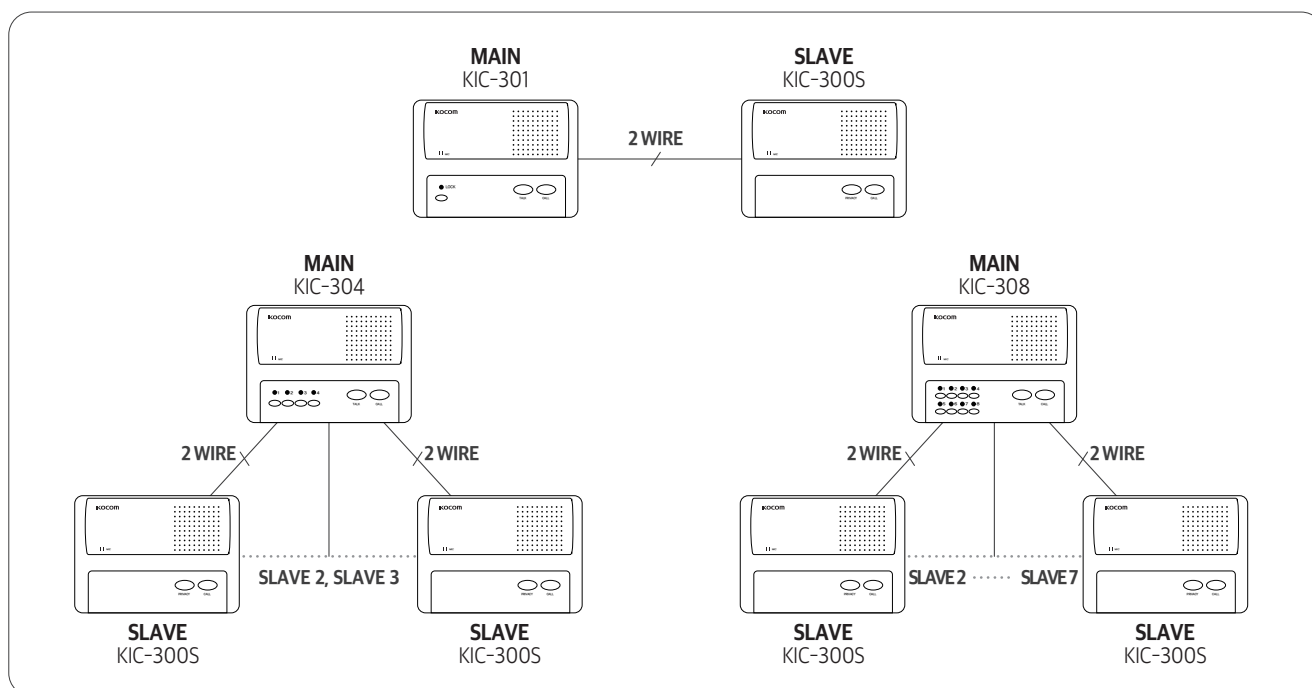




06.

**POWER SUPPLY**

## POWER SUPPLY

**KDPS-12V075A220** **NEW****SPECIFICATIONS**

|                       |                                  |
|-----------------------|----------------------------------|
| Input Voltage         | AC 220~240V, 50/60Hz 0.2A        |
| Output Voltage        | DC12V / AC24V                    |
| Output Current        | DC : 0.75A(9W) / AC : 0.75A(18W) |
| Operating Temperature | -10~45°C (14~113°F)              |
| Operating Humidity    | 10%~90%RH (No condensation)      |
| Dimension             | 78(W) x 140(H) x 70(D)mm         |

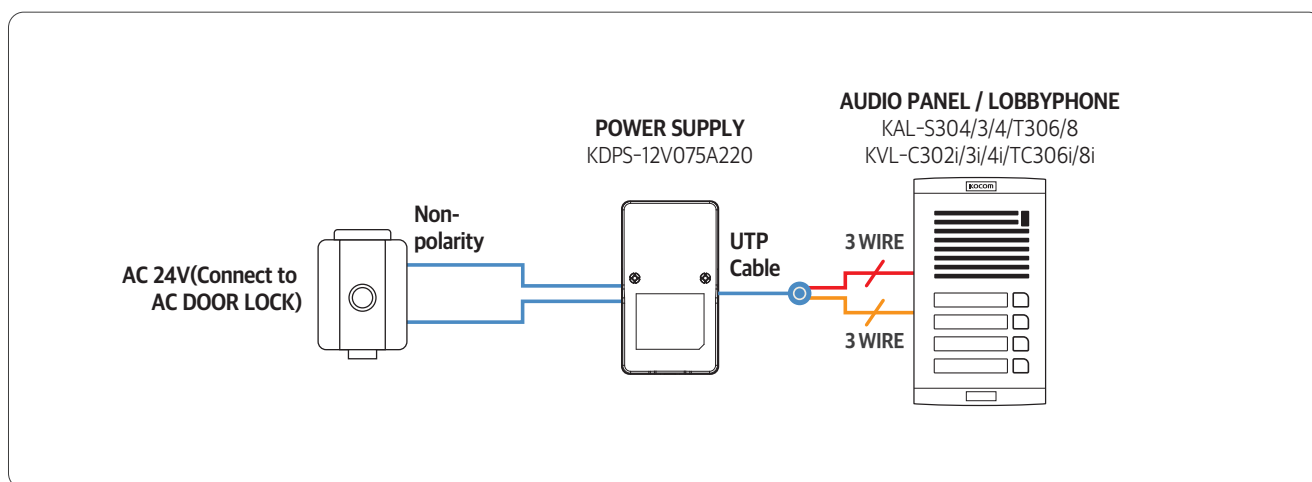**WIRING DIAGRAM**

## POWER SUPPLY

**PA-120150S (12V DC)** **NEW****SPECIFICATIONS**

|                |                           |
|----------------|---------------------------|
| Input Voltage  | AC 220~240V ,50/60Hz 0.4A |
| Output Voltage | DC12V / AC24V             |
| Output Current | DC 12V                    |
| Dimension      | 52(W) x 81(H) x 30(D)mm   |



## POWER SUPPLY

# KPL-040M-VI (24V DC) NEW

### SPECIFICATIONS

|                       |                             |
|-----------------------|-----------------------------|
| Input Voltage         | AC 100-240V, 50/60Hz        |
| Output Voltage        | DC 24V                      |
| Output Power          | 40W                         |
| DC Output Current     | 2.67A                       |
| Operating Temperature | -10~45°C (14~113°F)         |
| Operating Humidity    | 10%~90%RH (no condensation) |
| Dimension             | 52(W) x 116(H) x 31(D)mm    |



## POWER SUPPLY

# KPL-040H-VI (15V DC) NEW

### SPECIFICATIONS

|                       |                             |
|-----------------------|-----------------------------|
| Input Voltage         | AC 100-240V, 50/60Hz        |
| Output Voltage        | DC 15V                      |
| Output Power          | 40W                         |
| DC Output Current     | 2.67A                       |
| Operating Temperature | -10~45°C (14~113°F)         |
| Operating Humidity    | 10%~90%RH (no condensation) |
| Dimension             | 52(W) x 116(H) x 31(D)mm    |



## POWER SUPPLY

# MKC-0600450HUK (6V DC) NEW

### SPECIFICATIONS

|                       |                             |
|-----------------------|-----------------------------|
| Input Voltage         | AC 100-240V, 50/60Hz        |
| Output Voltage        | DC 6V                       |
| Output Power          | 1.8W                        |
| DC Output Current     | 0.45A                       |
| Operating Temperature | -10~40°C (14~104°F)         |
| Dimension             | 39(W) x 62.2(H) x 27.1(D)mm |

[illegible]





# TO MAKE LIFE MORE CONVENIENT AND SAFER

A company that provides a total solution for a safe,  
convenient and human-centered life.



Scan the QR code to check out the catalog on your mobile !

2025

# PRODUCTS CATALOG



Business card

**KOCOM**

📍 **Blue Lab in Magok**

5-gil 16, Magok Jungang 8-ro, Gangseo-gu, Seoul, Korea

📍 **Gimpo Branch Office**

22, Arayuk-ro, Gochon-eup, Gimpo-si, Gyeonggi-do, Korea

TEL : 02-6675-2211

FAX : 02-6675-2100

E-mail : global@kocom.co.kr